

# MacroPower 400 – 2200 t

The compact large machine

world of innovation



# POWERFUL – COMPACT – UNIVERSAL

## The benchmark for large machines

### The advantages

- » Small footprint through compact design
- » Generously dimensioned 4 tie-bar/2 platen clamping system
- » Long-stroke system to “release” the tie-bars facilitates lateral insertion of large molds
- » Minimal dry cycle time through synchronized closing of the tie-bar nuts
- » Smooth-running platen movements and sensitive mold protection thanks to linear guides
- » User-friendly thanks to Unilog B8 control system with integrated assistance systems
- » Fast through parallel operation of ejector and core pull with platen movement
- » Powerful injection unit with servo valve control
- » With Wittmann 4.0 central operation of machine and auxiliaries via B8 monitor screen
- » Positioning of hydraulic system and electric modules for easy servicing
- » Attractive price/size ratio

### The machine series

MacroPower standard: 19 clamping force sizes from 400 to 2200 t

MacroPower Combimould: for multi-component injection molding – from 400 to 2200 t





## MacroPower

### The system highlights

- » **Servo drive is standard for the hydraulic system ("Drive-on-Demand")**  
All standard MacroPower machines are driven via a modular twin-pump hydraulic system with fixed displacement pump. Parallel movements for core pull and ejector are standard. Additional pump stages (optional) increase the number and performance of parallel movements.
- » **Precise and powerful screw drive**  
All MacroPower injection units come with hydraulic drive systems as standard. Servo drives for dosing are available as an option. Injection and holding pressure are controlled via a servo valve. Thanks to the system-specific low height of the machine, access to the barrel unit and nozzle for cleaning is easy.
- » **Clamping system – generously dimensioned**  
The MacroPower clamping system is a 4 tie-bar/ 2 platen system with generously dimensioned mold mounting platens. All four tie-bars each come with a pressure cushion unit and are anchored in the fixed platen of the machine. The tie-bars are position-monitored and guarantee optimal platen parallelism.
- » **Quicklock clamping system – synchronous, fast**  
The power transmission between the fixed and the moving system platen is effected by positive locking via the tie-bars, which are gripped by toothed segment half shells in the moving platen. Short locking times are achieved by synchronized movements of all nuts. Long-stroke cylinders move the platen, which is guided on linear bearings. The pressure cushions serve to build up the clamping force.
- » **Insertion of the mold made easy**  
The MacroPower clamping system provides a large gap between the ends of the tie-bars and the moving platen, thanks to its standard large platen stroke and the relatively short length of the tie-bars. This allows for lateral insertion and fastening of the molds from the rear of the machine using a crane.

# CLAMPING UNIT

## High functionality with ample mold space

- » **Large and flexible**  
The extensive MacroPower system construction kit offers a wide range of combination options from numerous clamping force variants with matching distances between tie-bars, in both standard and XL versions.
- » **Sensitive and precise**  
In the MacroPower clamping system, the tie-bars are only used for the force transmission between the mold platens. The moving platen is mounted on a carriage, which travels on high-precision linear bearings along the machine frame. The minimal rolling friction in the linear bearings is the prerequisite for highly sensitive mold protection and high cleanliness.
- » **Fast and synchronized**  
The Quicklock locking system between the tie-bars and the moving platen consists of four synchronized tooth segment nuts, which are integrated in the moving platen to minimize the machine's footprint.
- » **Compact design for minimal footprint**  
The integrated tie-bar nuts and short tie-bars offer two advantages: short footprint and simultaneously free space for lateral mold insertion.
- » **Symmetrical and powerful**  
The moving platen is driven by two diagonally positioned traveling cylinders designed for high speed. The traveling drive in combination with a hydraulic differential gear system provides the basic conditions for high speed, precision in movements and power.




# INJECTION UNIT

Servo-controlled and precise

**Wittmann**

- » **Everything to ensure series consistency**
  - All screws come with a 22:1 L/D ratio.
  - Direct drive via hydro motor (fast-running servo motor available as an option)
  - Maximum repeatability through servo valve control for injection and holding pressure
  - Moment-free nozzle contact through axial positioning of the traveling cylinders
  - Wide range of suitable screws and barrels for various process technologies available
  - WITTMANN BATTENFELD HiQ software modules (optional) offer extensive facilities for compensating environmental factors such as fluctuations in temperature, moisture, regrind or masterbatch content.
  
- » **Extremely easy operation and flexibility**
  - Free access to the injection unit for easy material feeding, machine setting and servicing
  - Maximum maintenance-friendliness thanks to compact design and free accessibility

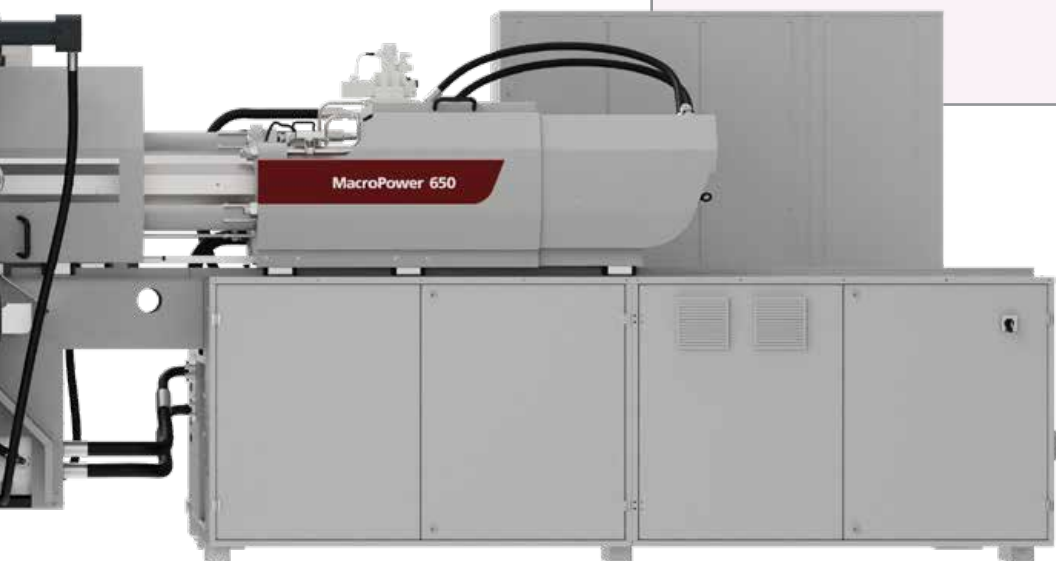

#### Anti-wear options

In addition to the premium-quality standard equipment, an extensive range of options is available to provide extra anti-wear and/or anti-corrosion protection. Predefined option packages and a selection matrix facilitate the selection of the right plasticizing unit.

# DRIVE TECHNOLOGY

Energy efficient and modular



## Fast-responding, precise, thrifty

"Drive-on-Demand" is the innovative combination of a fast-responding, speed-controlled, air-cooled servo motor with a fixed displacement pump. This drive unit is only activated when required by movements and pressure build-up. During cooling times or cycle pauses for parts handling, the servo drive remains switched off and thus consumes no energy. In operation, "Drive-on-Demand" is the basis for highly dynamic, controlled machine movements and short cycle times. Monitored shut-off valves are installed in the suction pipes to ensure operational safety.

The "Drive-on-Demand" system is standard in the MacroPower machine series.

## Hydraulic system extension levels for parallel functions

- » S1: twin pump system for parallel movements of ejector and core pull
- » S2: twin pump system with increased drive performance (optional) for parallel movements of ejector and core pull plus faster injection
- » S4: twin pump system with increased drive performance (optional) for parallel movements of ejector and core pull and high-speed injection with an accumulator for short cycle times

## A brake on operating costs


- » The "Drive-on-Demand" system is standard equipment.
- » "Drive-on-Demand" lowers energy consumption by up to 40 per cent compared to modern variable displacement pump systems.
- » Additional energy cost cuts through reduction of idle power
- » Lower total expense for cooling, since oil cooling is normally not required
- » Lower maintenance expense through longer preservation of the oil quality due to less thermal load
- » Lower sound emission levels, consequently less investment in sound protection required
- » Second servo drive package is standard, third servo drive package for parallel movements for the mold shut-off nozzle system as an option



# PRODUCTION CELL

## Customized configuration


Wittmann

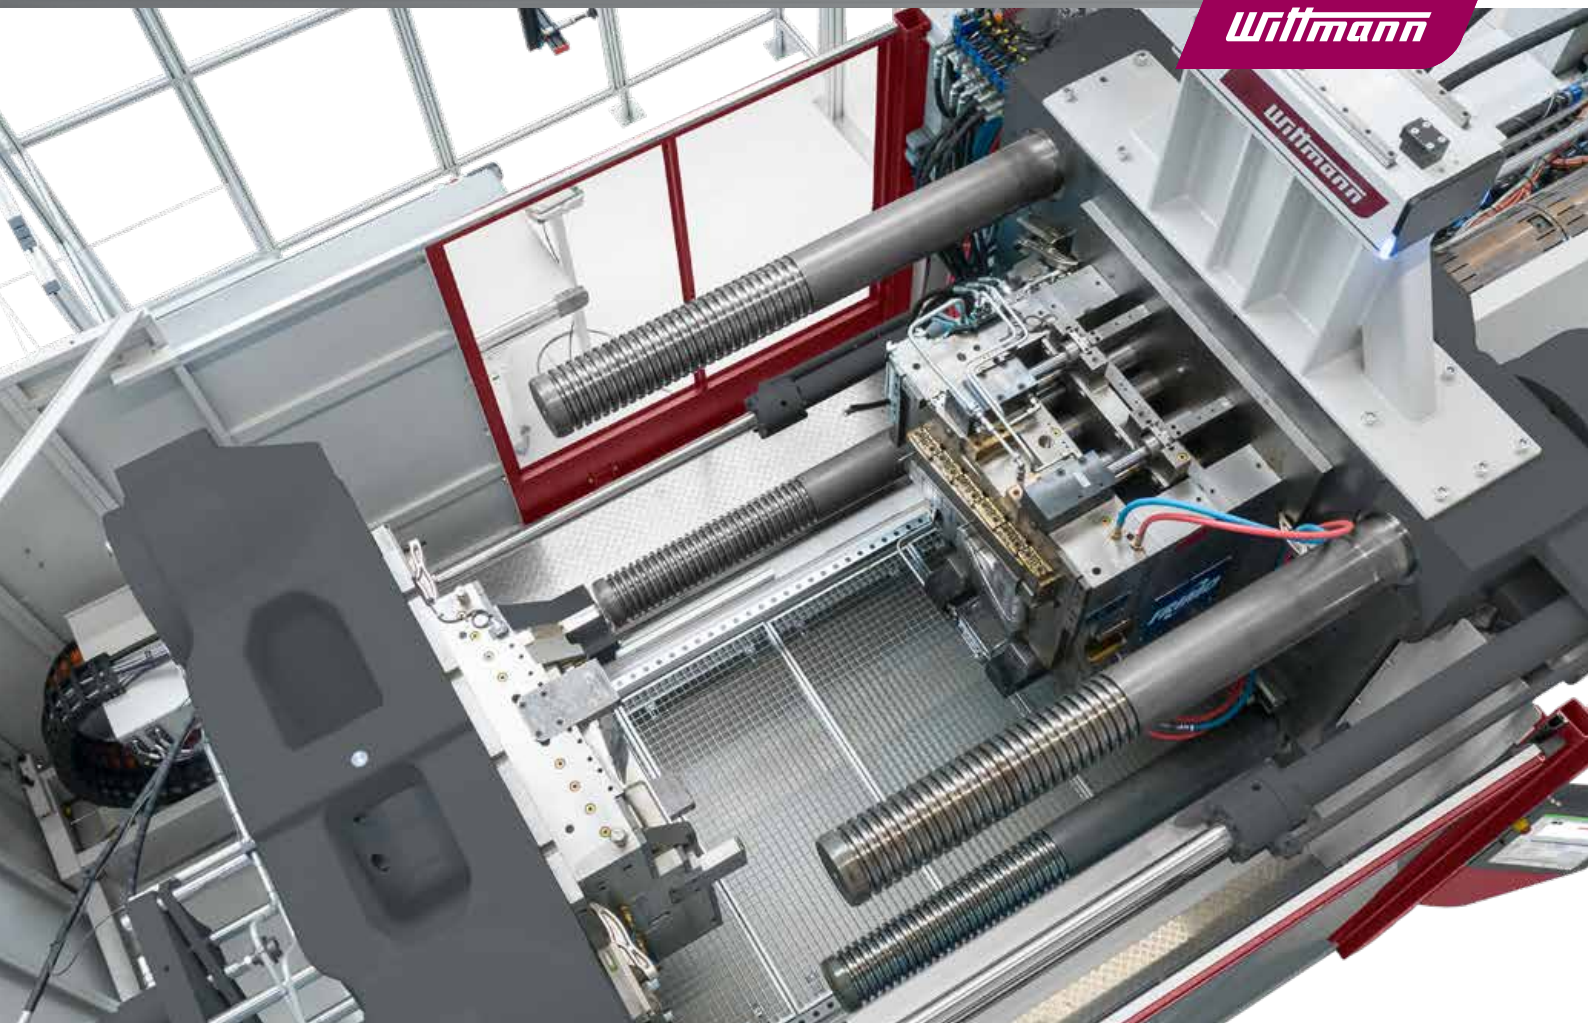

WITTMANN BATTENFELD injection molding machines come with a flexibly adjustable basic modular design. From this basis, the machine can be extended with a wide range of automation equipment into a production cell. This includes primarily devices for fast mold change, fast coupling of complex media connections and the automation of finished parts handling.

### MacroPower automation options:

- » **"Handling robot automation module"** with linear or articulated arm robot and logistics auxiliaries
- » **Mold clamping systems**  
Both hydraulic and magnetic clamping systems are available including all safety monitoring features, if required combined with roller conveyor units for lateral mold transfer.
- » **Automatic mold change system** as fixed carriage and pre-heating station or as a flexibly movable carriage system with docking interface
- » **Combination with WITTMANN auxiliaries via Wittmann 4.0**  
Temperature control or cooling, material feeding, coloring and drying

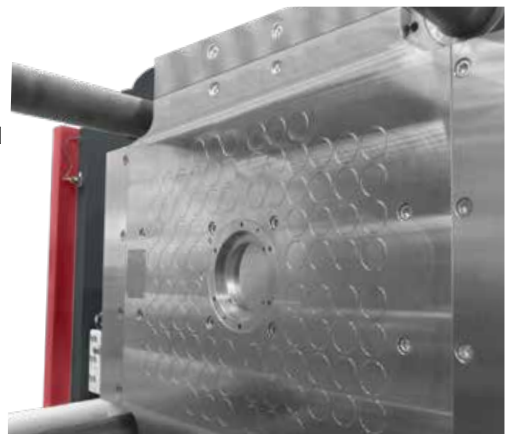

# UNILOG B8

## Complex matters simplified

The Unilog B8 machine control system is the WITTMANN BATTENFELD solution to facilitate the operation of complex processes for human operators. For this purpose, the integrated industrial PC has been equipped with an enlarged intuitive touch screen operator terminal. The visualization screen is the interface to the Windows® 10 IoT operating system, which offers extensive process control functions. Next to the pivotable monitor screen, a connected panel/handset is mounted on the machine's central console.



### Unilog B8 Highlights

- » **Operating logic**  
with a high degree of self-explanation, similar to modern communication devices
- » **2 major operating principles**
  - Operating/movement functions via tactile keys
  - Process functions on touch screen (access via RFID, key card or key ring)
- » **Process visualization**  
via 21.5" touch screen display (full HD), pivoting laterally
- » **New screen functions**
  - Uniform layout for all WITTMANN auxiliaries
  - Recognition of gestures (wiping and zooming by finger movements)
  - Container function – split screen for sub-functions and programs
- » **Status visualization**  
uniform signaling system across the entire WITTMANN Group
  - Headline on the screen with colored status bars and pop-up menus
  - AmbiLED display on machine
- » **Operator assistance**
  - QuickSetup: process parameter setting assistant using an integrated material database and a simple query system to retrieve molded part data with machine settings pre-selection
  - Extensive help library integrated



# The process in constant view

**Wittmann**

## » SmartEdit



SmartEdit is a visual, icon-based cycle sequence programming facility, which enables direct addition of special functions (core pulls, air valves, etc.) based on a standard process via touch operation on the screen. In this way, a total user-defined sequence can be compiled from a sequence menu. This machine cycle, visualized either horizontally or vertically, can be adjusted simply and flexibly to the process requirements by finger touch with "drag & drop" movements.

### The advantages

- Icon visualization ensures clarity.
- Clear events sequence through node diagram
- Alterations without consequences through "dry test runs"
- Theoretical process sequence can be quickly implemented in practice.
- Automatic calculation of the automation sequence based on the actual set-up data set without machine movements

## » SmartScreen

- Partitioning of screen displays to visualize and operate two different functions simultaneously (e.g. machines and auxiliaries)
- Uniform design of the screen pages within the WITTMANN Group
- Max. 3 containers can be addressed simultaneously for the SmartScreen function.
- Adjustments of set values can be effected directly in the set value profile.

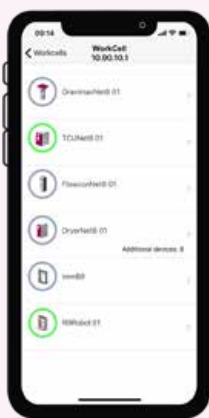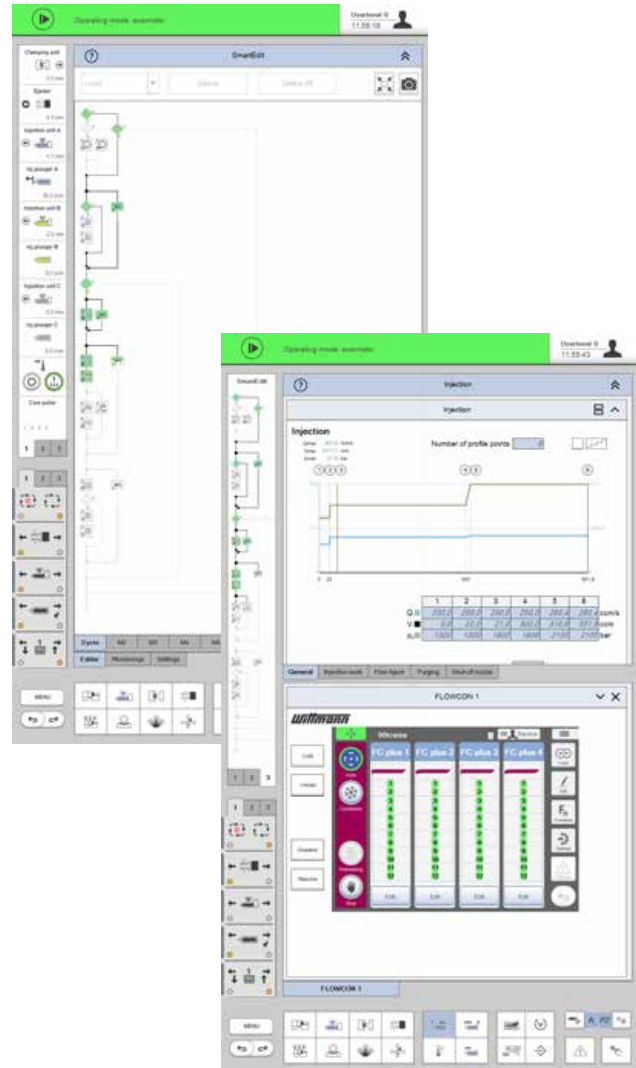

## Remote communication

### » QuickLook 4.0

Quick & easy production status check via Smartphone:

- Operation and status data from all Wittmann 4.0-compatible appliances in a production cell
- Complete overview of the most important production parameters
- Access to operation data, alarm signals and user-defined data
- The production cell overview offers a clear, simple overview of the production cell's general condition and that of its individual Wittmann 4.0 appliances.

### » Global online service network

- Web-Service 24/7: direct Internet connection to WITTMANN BATTENFELD service
- Web training: efficient staff training by means of the virtual training center

# WITTMANN 4.0

## Communication in and with production cells

With its communication standard Wittmann 4.0, the WITTMANN group offers a uniform data transfer platform between injection molding machines and auxiliaries from WITTMANN. In case of an appliance change, the corresponding visualizations and settings are loaded automatically via an update function, following the principle of "Plug & Produce".



### Connection of auxiliaries via Wittmann 4.0

- » **WITTMANN Flowcon plus water flow regulator, Gravimax blenders and Aton dryers**
  - Units directly addressed and controlled via the machine's control system
  - Joint saving of data in the production cell, the machine and in the network via MES
- » **WITTMANN robots with R9 control system**
  - Operation of robots via the machine's monitor screen
  - High-speed communication between machine and robot to synchronize movements
  - Important machine movements can be set via the R9 robot control system.
- » **WITTMANN Tempro plus D temperature controllers**
  - Setting and control of temperatures via the machine's control system possible
  - All functions can be operated either on the unit or via the machine's control system.

### Integration in MES system

The integration of machines and complete production cells in an MES system is a prerequisite for an efficient and transparent production facility according to the Industry 4.0 concept.

Depending on customers' requirements, small and medium-sized companies as well as global players are offered a compact MES solution based on TEMI+. With the Windows® 10 IoT operating system it is also possible to have selected status information from all connected machines on the production floor shown under Smart-Monitoring on the display screen of every machine.

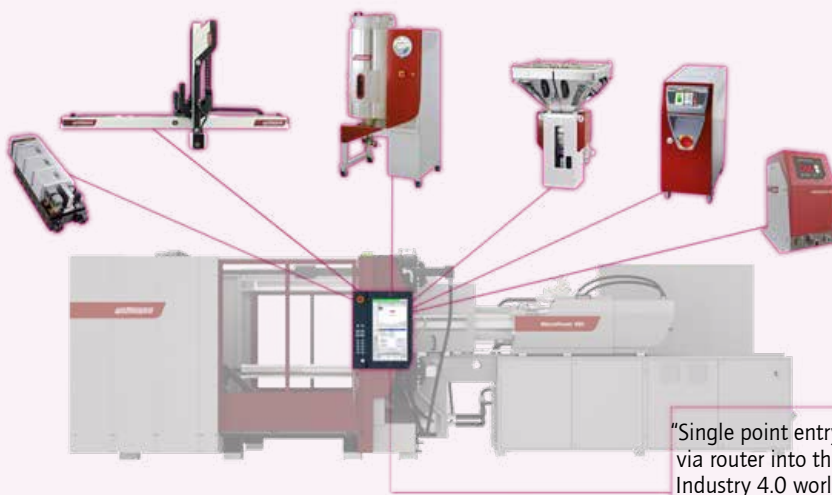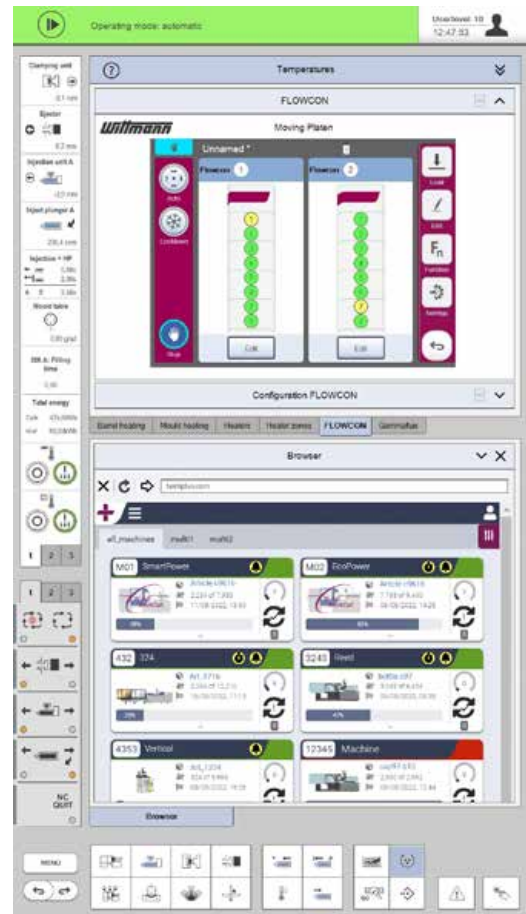


**Wittmann 4.0 system**  
With Wittmann 4.0, a machine and its robots and auxiliaries are transformed into a uniform technical organism, which communicates externally via a specific IP address. Such a "single point entry" with an integrated internal firewall substantially increases cyber security.

# OPTIONS

Modular and flexible

**Wittmann**

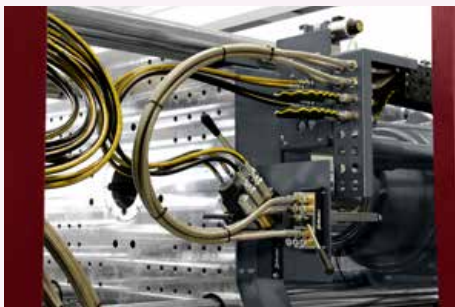


## MacroPower

### The optional highlights

- » **Tie-bar removal device**  
If the standard platen stroke to release the tie-bars is not sufficient for a mold change, a hydro-mechanical tie-bar removal device integrated in the pressure cushion is available as an option. Removing and pushing back the tie-bars are fully automatic processes taking no more than a few minutes.
- » **Servo-electric plasticizing**  
As an alternative to screw rotation by a hydro motor, an optional direct drive with a servomotor can be supplied. It reduces energy consumption and offers additional facilities for parallel operation of the clamping and plasticizing units.
- » **Free space for conveyor belt in the small sizes of large machines as standard**  
In the machines from 400 to 700 t clamping force, the machine frame comes prepared for the installation of a conveyor belt inside the frame for longitudinal transport of molded parts. An optional elevation of the frame to accommodate a conveyor belt for parts transport to the side can also be supplied.
- » **Fast media coupling**  
In addition to the ergonomically positioned standard connection points for cooling water, air and core pull hydraulics, optional fast coupling units can be installed (individual or system plates), which also accommodate the power connections for the hot runner heating circuits, temperature and pressure sensors and coding signals. The degree of automation can be further increased by adding a quick mold clamping system.
- » **WITTMANN auxiliaries**  
The comprehensive range of WITTMANN auxiliaries offers appropriate solutions for all secondary processes of injection molding, including parts handling, material feeding and drying, sprue recycling, mold cooling and temperature control. Via the optional Wittmann 4.0 integration package, all additional auxiliaries can be integrated into the injection molding machine's program sequence according to the "Plug & Produce" principle.

# APPLICATION TECHNOLOGY

## Outstanding competence

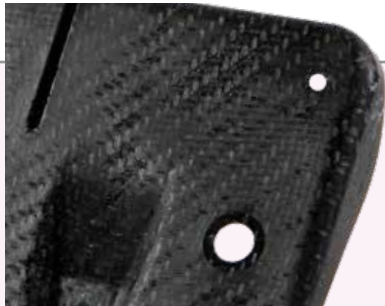

- » **Lightweight construction**  
MacroPower machines and WITTMANN handling technology including automation expertise offer ideal conditions for making large composite parts from flat fiber materials and injection-molded carrier structures.



- » **Cellmould – structured foam technology**  
The production of structured foam parts through targeted blending of pressurized nitrogen or carbon dioxide into the plastic melt prior to injection into the mold has been a WITTMANN BATTENFELD core competence based on in-house R & D for more than 30 years.



- » **Airmould – gas injection process**  
Airmould is the gas-assisted injection molding process developed by WITTMANN BATTENFELD. Its two variants are the Airmould internal gas pressure process and the Airmould Contour external gas pressure process.



- » **Combimould**  
When two or more plastic materials in different colors or plastic materials with different attributes need to be combined into one component, the MacroPower machines can be equipped with additional injection units in V, L, S or HH configuration as well as rotary tables and/or index units with servo drives.

Photo: Haidlmaier GmbH

# TECHNICAL DATA

## MacroPower




COMBINATIONS OF CLAMPING UNITS/INJECTION UNITS

Clamping unit t	Injection unit								
	1670	2250	3400	5100	8800	12800	16800	23300	33000
400	•	•	•	•					
450	•	•	•	•					
XL 450	•	•	•	•					
500	•	•	•	•	•				
550	•	•	•	•	•				
XL 550		•	•	•	•				
650		•	•	•	•				
700		•	•	•	•				
XL 700		•	•	•	•				
850		•	•	•	•	•			
900		•	•	•	•	•			
XL 900			•	•	•	•			
1000			•	•	•	•	•		
1100			•	•	•	•	•		
1300				•	•	•	•	•	
1500				•	•	•	•	•	
1600				•	•	•	•	•	
1800						•	•	•	•
2200						•	•	•	•

Material	Factor
ABS	0.88
CA	1.02
CAB	0.97
PA	0.91
PC	0.97
PE	0.71
PMMA	0.94
POM	1.15
PP	0.73

Material	Factor
PP + 20 % Talc	0.85
PP + 40 % Talc	0.98
PP + 20 % GF	0.85
PS	0.91
PVC hard	1.12
PVC soft	1.02
SAN	0.88
SB	0.88

The maximum shotweights (g) are calculated by multiplying the theoretical shot volume (cm<sup>3</sup>) by the above factor.

# DATA MacroPower 400/450


Clamping unit		MacroPower 400			MacroPower 450		
Clamping force	kN	4000			4500		
Distance between tie bars	mm x mm	900 x 750					
Mold height (min.)	mm	400					
Mold height (max.)	mm	850					
Opening stroke/opening force	mm/kN	1050/162					
Maximum daylight	mm	1450					
Ejector stroke/ejector force	mm/kN	250/81					
Dry cycle time <sup>1)</sup>	s – mm	2.7 – 525	2.7 – 525	2.7 – 525	2.7 – 525	2.7 – 525	2.7 – 525





Injection unit		1670			2250			3400			5100		
Screw diameter	mm	55	60	65	55	65	75	65	75	85	75	85	95
Screw stroke	mm	275	300	300	275	325	325	325	375	375	375	425	425
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	848	995	653	1078	1436	1078	1657	2128	1657	2412	3012
Specific injection pressure	bar	2343	1969	1678	2500	2070	1555	2500	2022	1574	2500	2110	1689
Max. screw speed	min <sup>-1</sup>	315			255			221			186		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	52	57	62	48	71	108	62	94	131	79	112	144
Max. screw torque	Nm	1940			2500	2625	2625	3000	3780	3780	4000	6300	6300
Nozzle stroke/contact force	mm/kN	500/100			850/129			850/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	299	357	417	242	338	450	325	433	556	452	581	725
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	388	462	542	363	507	675	455	606	778	581	746	932
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	686	816	958	726	1014	1351	1040	1385	1779	1291	1659	2072
Barrel heating power	kW	22.6	23.6	27	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9
Number of heating zones		5			6			6			6	6	7
Energy efficiency class <sup>3)</sup>		5+	6+	7+	6+	7+	8+	7+	8+	8+	7+	8+	8+

Drive		1670			2250			3400			5100		
Oil tank volume	l	800			800			800			1100		
Electrical power supply without/with Europackage	kVA	83/112			88/117			106/135			136/165		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			68		

Weights, dimensions		1670			2250			3400			5100		
Net weight clamping unit	kg	12500											
Net weight (exclusive oil) injection unit	kg	7000			7500			7500			9000		
Length x width x height <sup>5)</sup>	m	6.8 x 2.5 x 2.5			6.8 x 2.5 x 2.5			7.1 x 2.5 x 2.5			7.6 x 2.5 x 2.5		
Max. mold weight <sup>6)</sup>	kg	6500											
Min. mold dimension	mm x mm	450 x 450						500 x 500					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

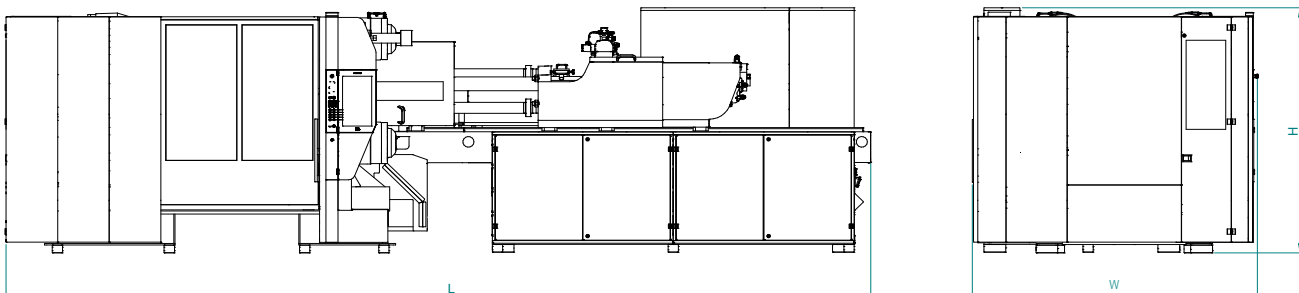

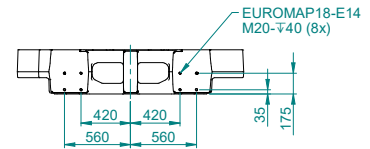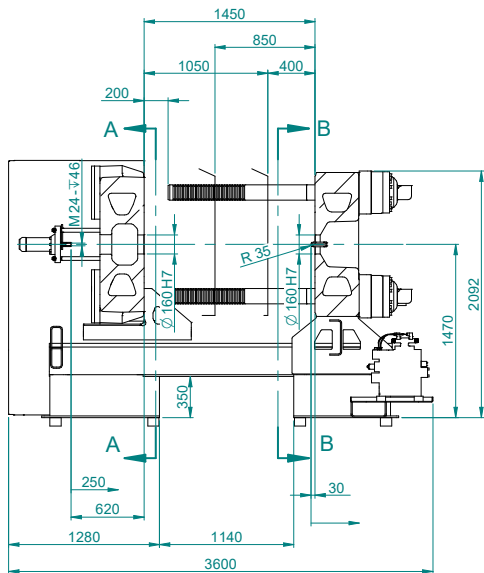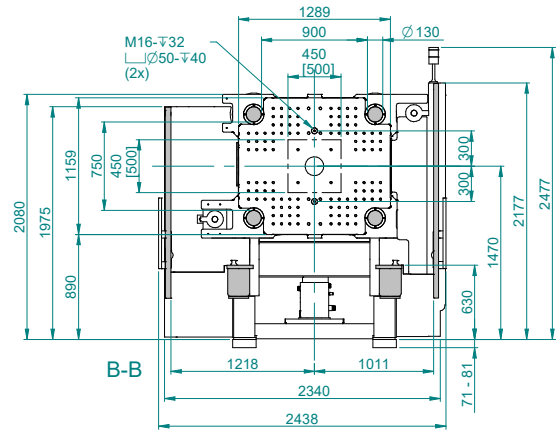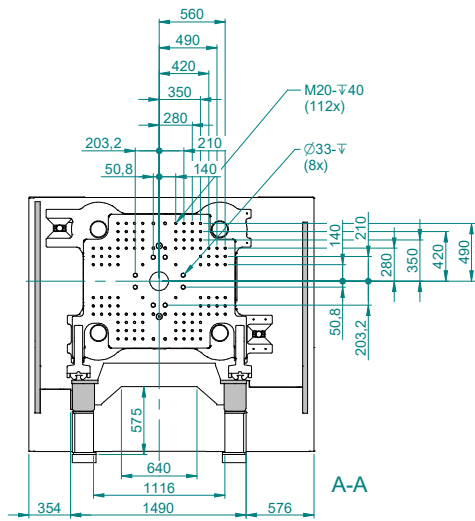

[Dimensions] MacroPower 450

# DATA MacroPower XL 450


Clamping unit		MacroPower XL 450			
Clamping force	kN	4500			
Distance between tie bars	mm x mm	1010 x 860			
Mold height (min.)	mm	450			
Mold height (max.)	mm	900			
Opening stroke/opening force	mm/kN	1200/211			
Maximum daylight	mm	1650			
Ejector stroke/ejector force	mm/kN	250/81			
Dry cycle time <sup>1)</sup>	s – mm	3.2 – 595	3.0 – 595	3.0 – 595	3.0 – 595

Injection unit		1670			2250			3400			5100		
Screw diameter	mm	55	60	65	55	65	75	65	75	85	75	85	95
Screw stroke	mm	275	300	300	275	325	325	325	375	375	375	425	425
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	848	995	653	1078	1436	1078	1657	2128	1657	2412	3012
Specific injection pressure	bar	2343	1969	1678	2500	2070	1555	2500	2022	1574	2500	2110	1689
Max. screw speed	min <sup>-1</sup>	315			318			221			186		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	52	57	62	59	88	133	62	94	131	79	112	144
Max. screw torque	Nm	1940			2500	2625	2625	3000	3780	3780	4000	6300	6300
Nozzle stroke/contact force	mm/kN	500/100			850/129			850/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	299	357	417	303	423	563	325	433	556	452	581	725
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	388	462	542	424	592	788	455	606	778	581	746	932
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	686	816	958	726	1014	1351	1040	1385	1779	1291	1659	2072
Barrel heating power	kW	22.6	23.6	27	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9
Number of heating zones		5			6			6			6	6	7
Energy efficiency class <sup>3)</sup>		5+	6+	7+	5+	6+	8+	6+	7+	8+	7+	7+	8+





Drive													
Oil tank volume	l	800			800			800			1100		
Electrical power supply without/with Europackage	kVA	101/130			106/135			106/135			136/165		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			68		

Weights, dimensions													
Net weight clamping unit	kg	16500											
Net weight (exclusive oil) injection unit	kg	7000			7500			7500			9000		
Length x width x height <sup>5)</sup>	m	7.1 x 2.6 x 2.5			7.1 x 2.6 x 2.5			7.4 x 2.6 x 2.5			7.9 x 2.6 x 2.5		
Max. mold weight <sup>6)</sup>	kg	8000											
Min. mold dimension	mm x mm	500 x 500											

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

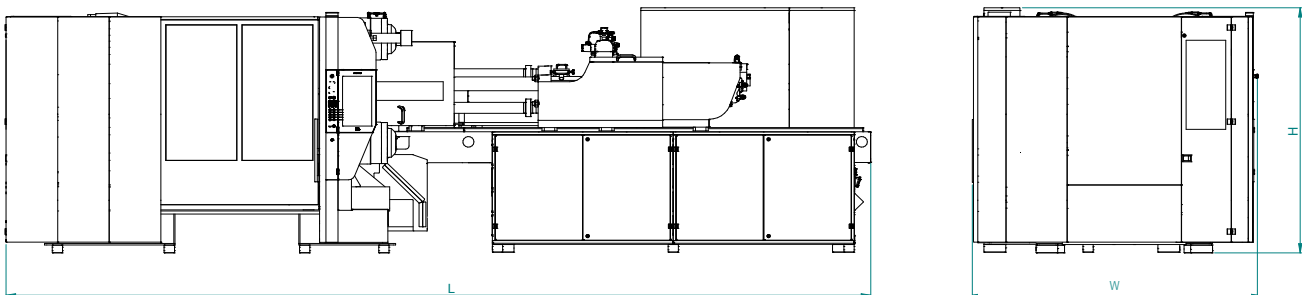



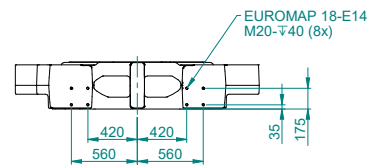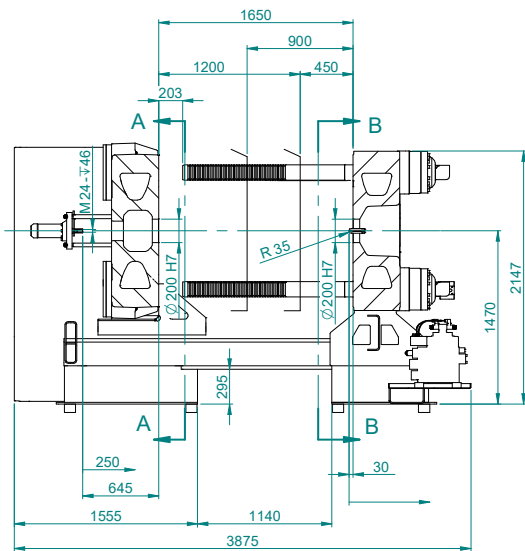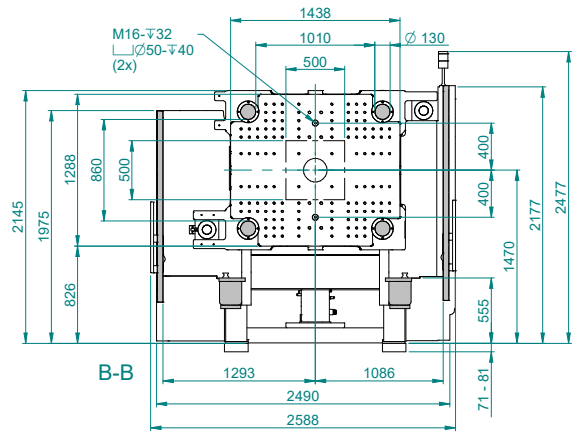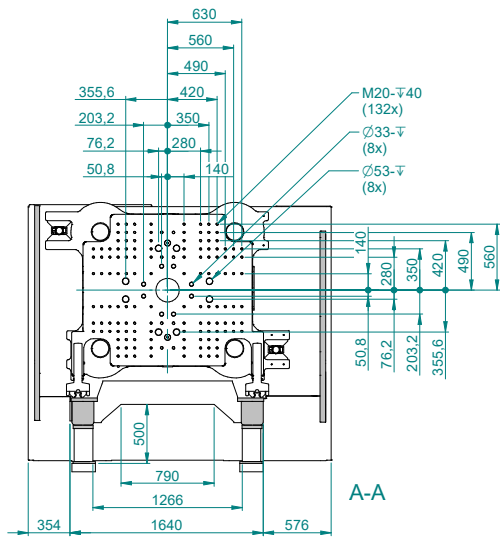

# DATA MacroPower 500/550



Clamping unit		MacroPower 500			MacroPower 550		
Clamping force	kN	5000			5500		
Distance between tie bars	mm x mm	1000 x 850					
Mold height (min.)	mm	450					
Mold height (max.)	mm	900					
Opening stroke/opening force	mm/kN	1200/211					
Maximum daylight	mm	1650					
Ejector stroke/ejector force	mm/kN	250/81					
Dry cycle time <sup>1)</sup>	s – mm	3.2 – 595	3.0 – 595	3.0 – 595	3.0 – 595	3.0 – 595	


Injection unit		1670			2250			3400			5100			8800		
Screw diameter	mm	55	60	65	55	65	75	65	75	85	75	85	95	95	105	120
Screw stroke	mm	275	300	300	275	325	325	325	375	375	375	425	425	475	525	525
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	848	995	653	1078	1436	1078	1657	2128	1657	2412	3012	3367	4545	5937
Specific injection pressure	bar	2343	1969	1678	2500	2070	1555	2500	2022	1574	2500	2110	1689	2359	1931	1479
Max. screw speed	min <sup>-1</sup>	315			318			221			186			159 159 149		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	52	57	62	59	88	133	62	94	131	79	112	144	123	144	194
Max. screw torque	Nm	1940			2500 2625 2625			3000 3780 3780			4000 6300 6300			8400 8400 9200		
Nozzle stroke/contact force	mm/kN	500/100			850/129			850/129			950/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	299	357	417	303	423	563	325	433	556	452	581	725	593	725	947
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	388	462	542	424	592	788	455	606	778	581	746	932	742	906	1183
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	686	816	958	726	1014	1351	1040	1385	1779	1291	1659	2072	1483	1812	2367
Barrel heating power	kW	22.6	23.6	27	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4
Number of heating zones		5			6			6			6 6 7			7		
Energy efficiency class <sup>3)</sup>		5+	6+	7+	5+	6+	8+	6+	7+	8+	7+	7+	8+	8+	8+	9+

Drive		1670			2250			3400			5100			8800		
Oil tank volume	l	800			800			800			1100			1100		
Electrical power supply without/with Europackage	kVA	101/130			106/135			106/135			136/165			175/204		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			68			70		

Weights, dimensions		1670			2250			3400			5100			8800		
Net weight clamping unit	kg	17000														
Net weight (exclusive oil) injection unit	kg	7000			7500			7500			9000			11500		
Length x width x height <sup>5)</sup>	m	7.1 x 2.6 x 2.5			7.1 x 2.6 x 2.5			7.4 x 2.6 x 2.5			7.9 x 2.6 x 2.5			8.8 x 2.6 x 2.5		
Max. mold weight <sup>6)</sup>	kg	8000														
Min. mold dimension	mm x mm	550 x 550						600 x 600								

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

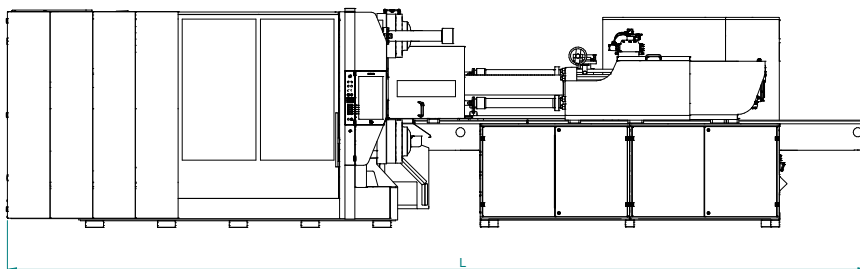

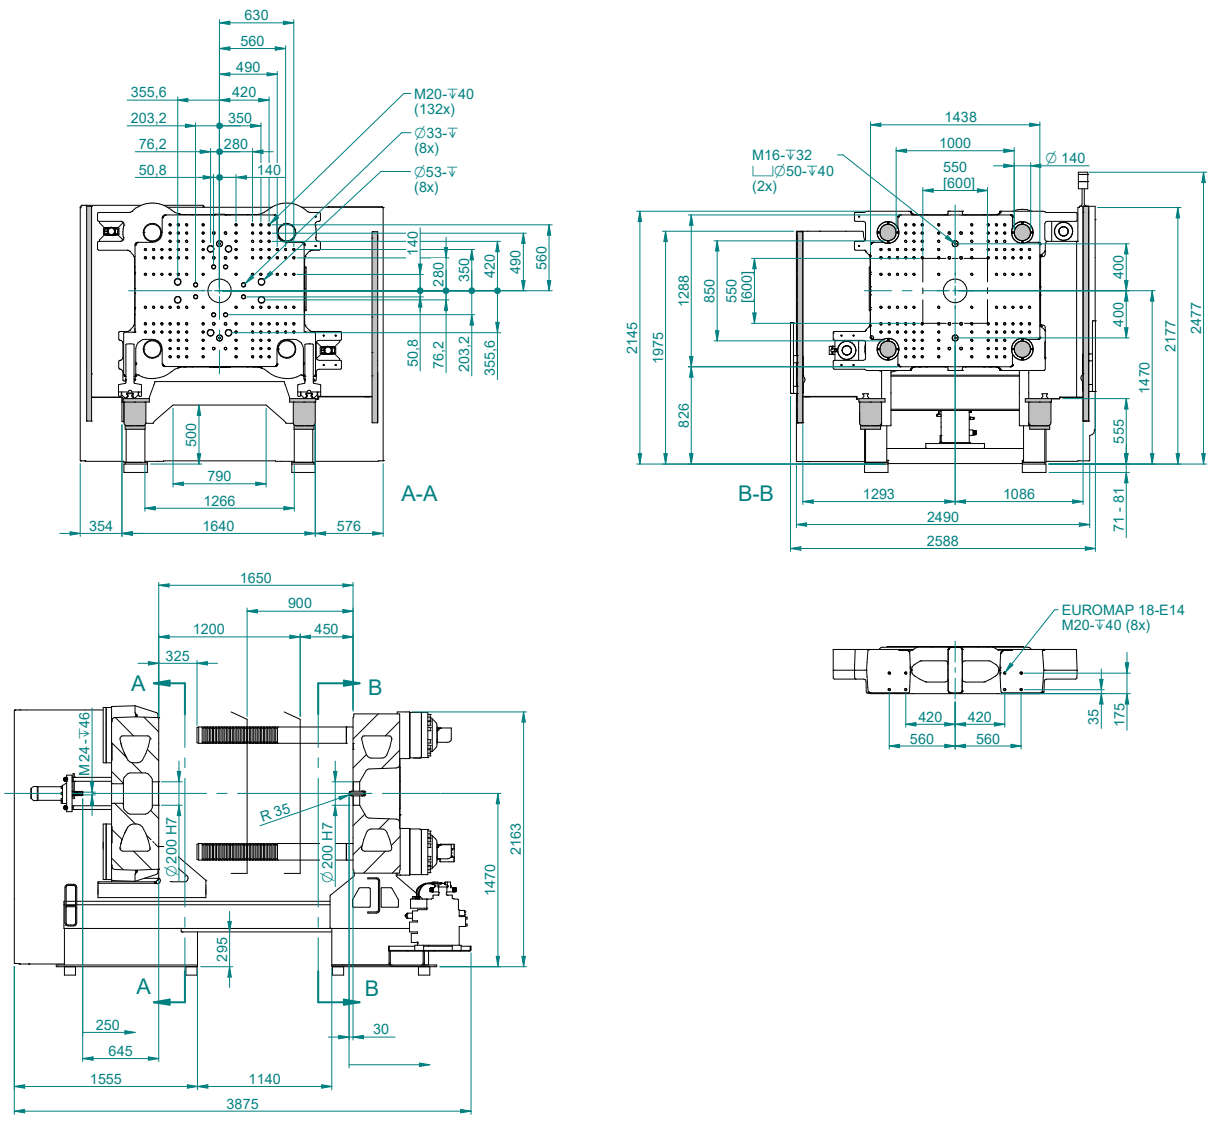

[Dimensions] MacroPower 550

# DATA MacroPower XL 550



Clamping unit		MacroPower XL 550			
Clamping force	kN	5500			
Distance between tie bars	mm x mm	1120 x 970			
Mold height (min.)	mm	450			
Mold height (max.)	mm	950			
Opening stroke/opening force	mm/kN	1400/211			
Maximum daylight	mm	1850			
Ejector stroke/ejector force	mm/kN	250/81			
Dry cycle time <sup>1)</sup>	s – mm	3.3 – 665	3.3 – 665	3.3 – 665	3.3 – 665





Injection unit		2250			3400			5100			8800		
Screw diameter	mm	55	65	75	65	75	85	75	85	95	95	105	120
Screw stroke	mm	275	325	325	325	375	375	375	425	425	475	525	525
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	1078	1436	1078	1657	2128	1657	2412	3012	3367	4545	5937
Specific injection pressure	bar	2500	2070	1555	2500	2022	1574	2500	2110	1689	2359	1931	1479
Max. screw speed	min <sup>-1</sup>	318			221			186			159		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	59	88	133	62	94	131	79	112	144	123	144	194
Max. screw torque	Nm	2500	2625	2625	3000	3780	3780	4000	6300	6300	8400	8400	9200
Nozzle stroke/contact force	mm/kN	850/129			850/129			950/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	303	423	563	325	433	556	452	581	725	593	725	947
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	424	592	788	455	606	778	581	746	932	742	906	1183
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	726	1014	1351	1040	1385	1779	1291	1659	2072	1483	1812	2367
Barrel heating power	kW	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4
Number of heating zones		6			6			6	6	7	7		
Energy efficiency class <sup>3)</sup>		5+	6+	8+	6+	7+	8+	7+	7+	8+	8+	8+	9+

Drive													
Oil tank volume	l	800			800			1100			1100		
Electrical power supply without/with Europackage	kVA	106/135			106/135			136/165			175/204		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			70		

Weights, dimensions													
Net weight clamping unit	kg	19000											
Net weight (exclusive oil) injection unit	kg	7500			7500			9000			11500		
Length x width x height <sup>5)</sup>	m	7.4 x 2.8 x 2.5			7.7 x 2.8 x 2.5			8.2 x 2.8 x 2.5			9.1 x 2.8 x 2.5		
Max. mold weight <sup>6)</sup>	kg	10000											
Min. mold dimension	mm x mm	600 x 600											

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

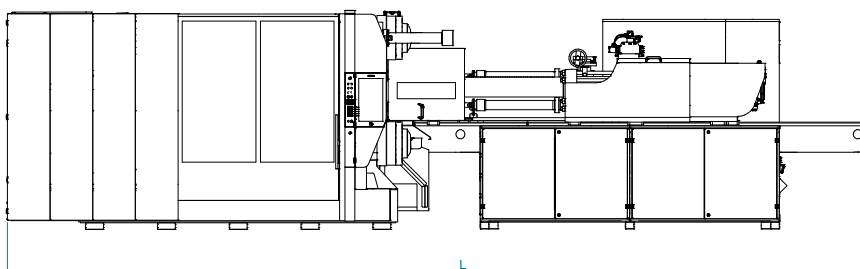

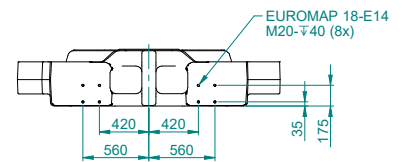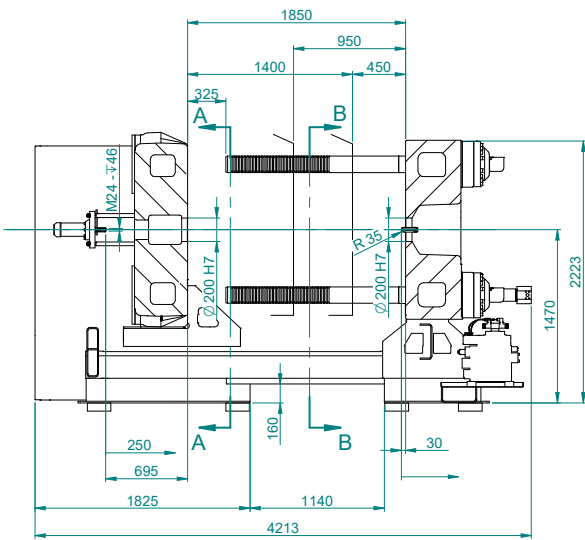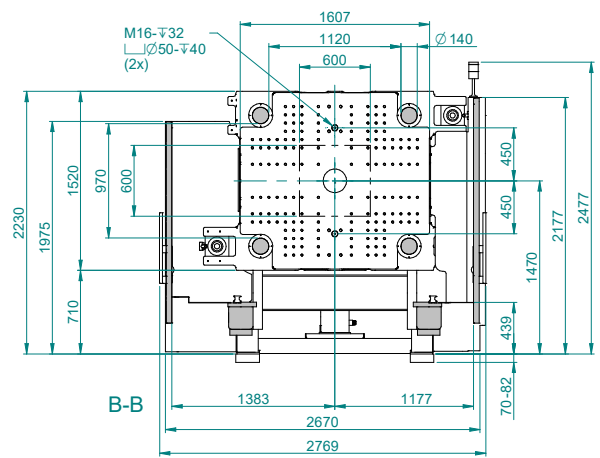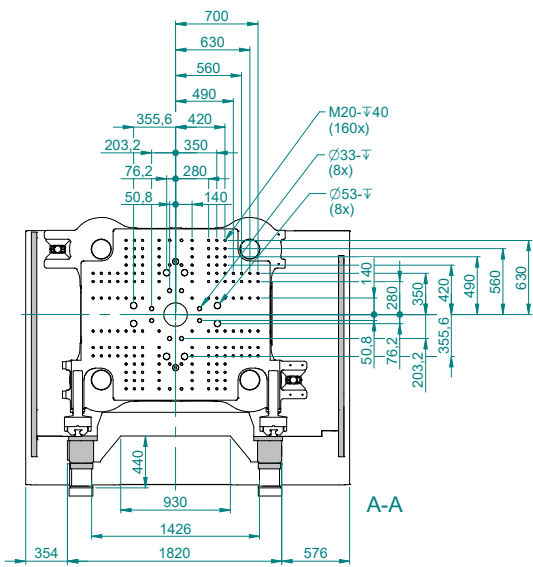

# DATA MacroPower 650/700



Clamping unit		MacroPower 650			MacroPower 700		
Clamping force	kN	6500			7000		
Distance between tie bars	mm x mm	1100 x 950					
Mold height (min.)	mm	450					
Mold height (max.)	mm	950					
Opening stroke/opening force	mm/kN	1400/211					
Maximum daylight	mm	1850					
Ejector stroke/ejector force	mm/kN	250/81					
Dry cycle time <sup>1)</sup>	s – mm	3.3 – 665		3.3 – 665		3.3 – 665	3.3 – 665





Injection unit		2250			3400			5100			8800		
Screw diameter	mm	55	65	75	65	75	85	75	85	95	95	105	120
Screw stroke	mm	275	325	325	325	375	375	375	425	425	475	525	525
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	1078	1436	1078	1657	2128	1657	2412	3012	3367	4545	5937
Specific injection pressure	bar	2500	2070	1555	2500	2022	1574	2500	2110	1689	2359	1931	1479
Max. screw speed	min <sup>-1</sup>	318			221			186			159		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	59	88	133	62	94	131	79	112	144	123	144	194
Max. screw torque	Nm	2500	2625	2625	3000	3780	3780	4000	6300	6300	8400	8400	9200
Nozzle stroke/contact force	mm/kN	850/129			850/129			950/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	303	423	563	325	433	556	452	581	725	593	725	947
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	424	592	788	455	606	778	581	746	932	742	906	1183
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	726	1014	1351	1040	1385	1779	1291	1659	2072	1483	1812	2367
Barrel heating power	kW	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4
Number of heating zones		6			6			6	6	7	7		
Energy efficiency class <sup>3)</sup>		5+	6+	8+	6+	7+	8+	7+	7+	8+	8+	8+	9+

Drive													
Oil tank volume	l	800			800			1100			1100		
Electrical power supply without/with Europackage	kVA	106/135			106/135			136/165			175/204		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			70		

Weights, dimensions													
Net weight clamping unit	kg	19500											
Net weight (exclusive oil) injection unit	kg	7500			7500			9000			11500		
Length x width x height <sup>5)</sup>	m	7.4 x 2.8 x 2.5			7.7 x 2.8 x 2.5			8.2 x 2.8 x 2.5			9.1 x 2.8 x 2.5		
Max. mold weight <sup>6)</sup>	kg	10000											
Min. mold dimension	mm x mm	650 x 650						700 x 700					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

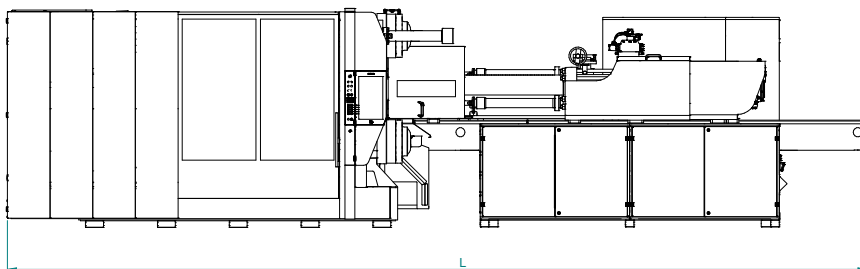

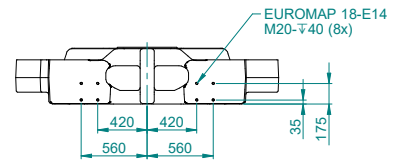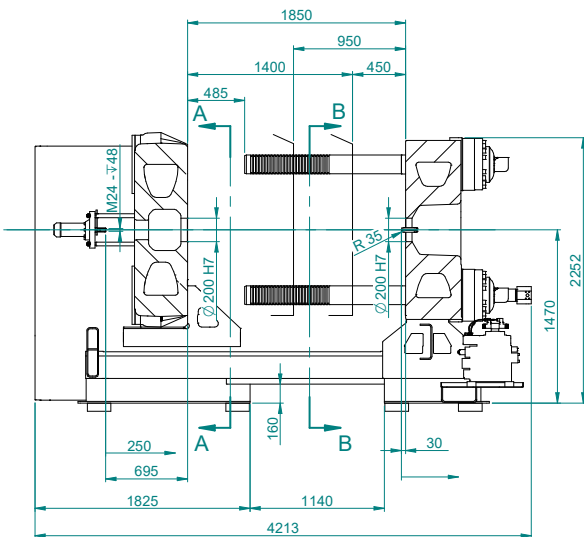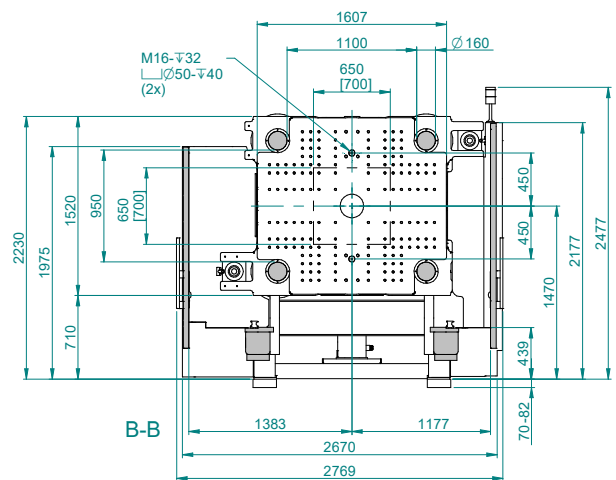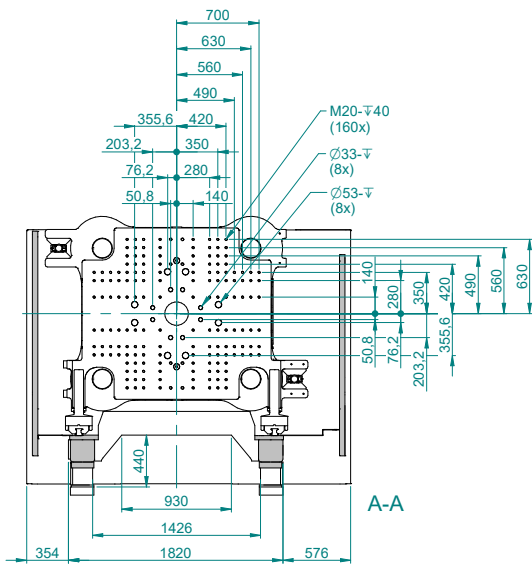

[Dimensions] MacroPower 700

# DATA MacroPower XL 700



Clamping unit		MacroPower XL 700			
Clamping force	kN	7000			
Distance between tie bars	mm x mm	1215 x 1015			
Mold height (min.)	mm	500			
Mold height (max.)	mm	1000			
Opening stroke/opening force	mm/kN	1600/330			
Maximum daylight	mm	2100			
Ejector stroke/ejector force	mm/kN	300/165			
Dry cycle time <sup>1)</sup>	s – mm	3.6 – 700	3.6 – 700	3.6 – 700	3.6 – 700

Injection unit		2250			3400			5100			8800		
Screw diameter	mm	55	65	75	65	75	85	75	85	95	95	105	120
Screw stroke	mm	275	325	325	325	375	375	375	425	425	475	525	525
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	1078	1436	1078	1657	2128	1657	2412	3012	3367	4545	5937
Specific injection pressure	bar	2500	2070	1555	2500	2022	1574	2500	2110	1689	2359	1931	1479
Max. screw speed	min <sup>-1</sup>	446			309			186			159		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	79	112	175	86	131	183	79	112	144	123	144	194
Max. screw torque	Nm	2500	2625	2625	3000	3780	3780	4000	6300	6300	8400	8400	9200
Nozzle stroke/contact force	mm/kN	850/129			850/129			950/129			950/129		
Injection rate into air	cm <sup>3</sup> /s	424	592	788	455	606	778	452	581	725	593	725	947
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	545	761	1013	585	779	1001	581	746	932	742	906	1183
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	726	1014	1351	1040	1385	1779	1291	1659	2072	1483	1812	2367
Barrel heating power	kW	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4
Number of heating zones		6			6			6	6	7	7		
Energy efficiency class <sup>3)</sup>		4+	5+	7+	5+	6+	7+	6+	7+	8+	7+	8+	8+





Drive													
Oil tank volume	l	1100			1100			1100			1100		
Electrical power supply without/with Europackage	kVA	130/160			130/160			136/165			175/204		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			70		

Weights, dimensions													
Net weight clamping unit	kg	24500											
Net weight (exclusive oil) injection unit	kg	8500			8500			9000			11500		
Length x width x height <sup>5)</sup>	m	8.7 x 3.0 x 2.7			8.7 x 3.0 x 2.7			8.7 x 3.0 x 2.7			9.6 x 3.0 x 2.7		
Max. mold weight <sup>6)</sup>	kg	12000											
Min. mold dimension	mm x mm	700 x 700											

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

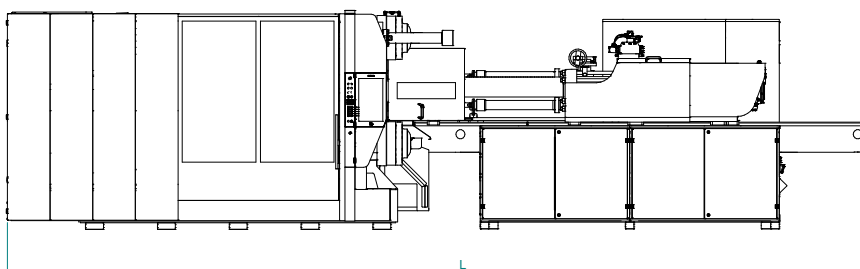



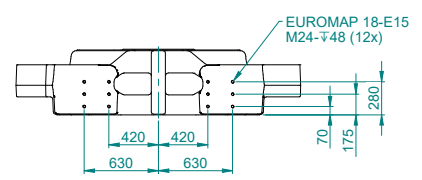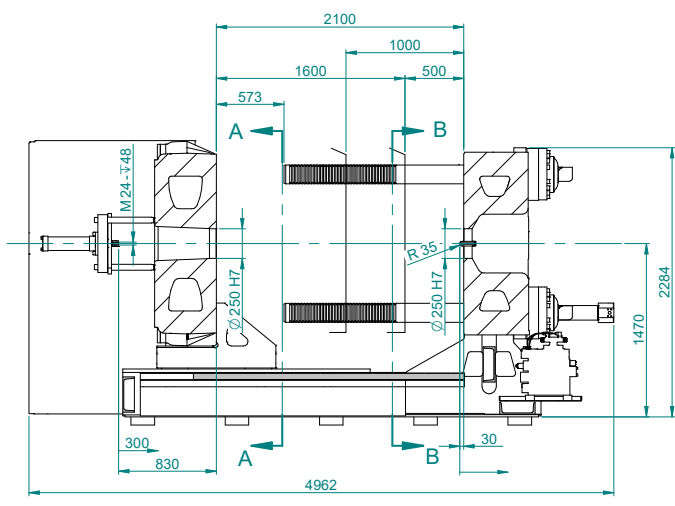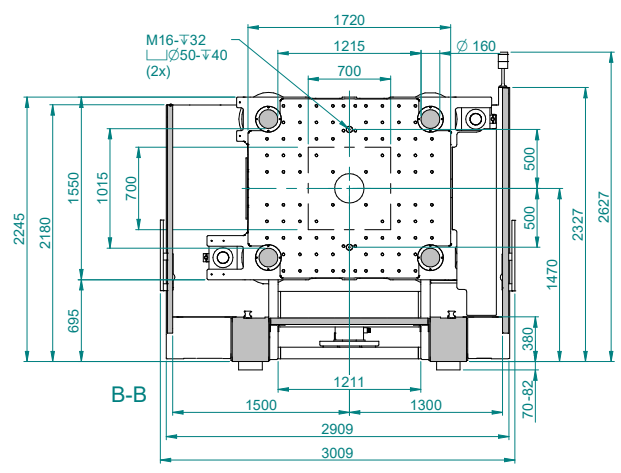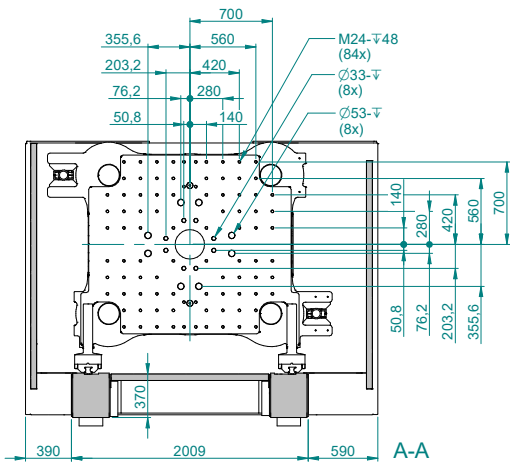

# DATA MacroPower 850/900


Clamping unit		MacroPower 850			MacroPower 900		
Clamping force	kN	8500			9000		
Distance between tie bars	mm x mm	1200 x 1000					
Mold height (min.)	mm	500					
Mold height (max.)	mm	1000					
Opening stroke/opening force	mm/kN	1600/330					
Maximum daylight	mm	2100					
Ejector stroke/ejector force	mm/kN	300/165					
Dry cycle time <sup>1)</sup>	s – mm	3.6 – 700	3.6 – 700	3.6 – 700	3.6 – 700	3.6 – 700	





Injection unit		2250			3400			5100			8800			12800		
Screw diameter	mm	55	65	75	65	75	85	75	85	95	95	105	120	105	120	135
Screw stroke	mm	275	325	325	325	375	375	375	425	425	475	525	525	525	600	600
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	653	1078	1436	1078	1657	2128	1657	2412	3012	3367	4545	5937	4545	6786	8588
Specific injection pressure	bar	2500	2070	1555	2500	2022	1574	2500	2110	1689	2359	1931	1479	2240	1878	1484
Max. screw speed	min <sup>-1</sup>	446			309			186			159			143		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	79	112	175	86	131	183	79	112	144	123	144	194	160	187	210
Max. screw torque	Nm	2500	2625	2625	3000	3780	3780	4000	6300	6300	8400	8400	9200	11500	11500	12500
Nozzle stroke/contact force	mm/kN	850/129			850/129			950/129			950/129			950/141		
Injection rate into air	cm <sup>3</sup> /s	424	592	788	455	606	778	452	581	725	593	725	947	703	918	1162
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	545	761	1013	585	779	1001	581	746	932	742	906	1183	859	1122	1421
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	726	1014	1351	1040	1385	1779	1291	1659	2072	1483	1812	2367	1563	2041	2583
Barrel heating power	kW	22.6	27	32.7	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4	68	81	88
Number of heating zones		6			6			6	6	7	7			7		
Energy efficiency class <sup>3)</sup>		4+	5+	7+	5+	6+	7+	6+	7+	8+	7+	8+	8+	7+	8+	9+

Drive													
Oil tank volume	l	1100			1100			1100			1100		
Electrical power supply without/with Europackage	kVA	130/160			130/160			136/165			175/204		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			68			68			70		

Weights, dimensions																
Net weight clamping unit	kg	26500														
Net weight (exclusive oil) injection unit	kg	8500			8500			9000			11500			15000		
Length x width x height <sup>5)</sup>	m	8.7 x 3.0 x 2.7			8.7 x 3.0 x 2.7			8.7 x 3.0 x 2.7			9.6 x 3.0 x 2.7			10.5 x 3.0 x 2.7		
Max. mold weight <sup>6)</sup>	kg	12000														
Min. mold dimension	mm x mm	750 x 750						800 x 800								

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

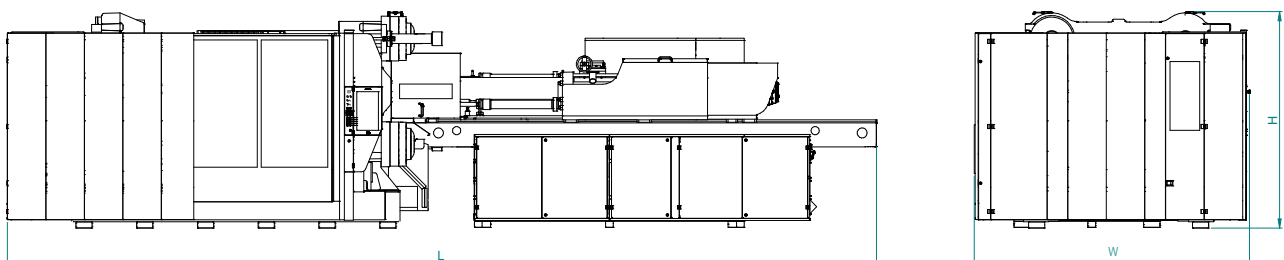

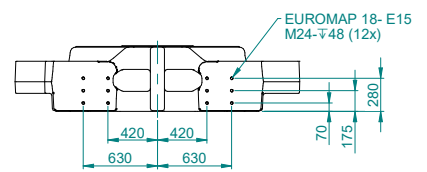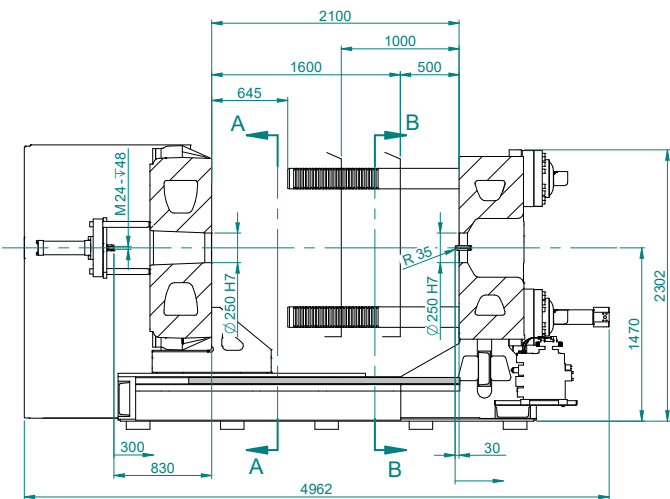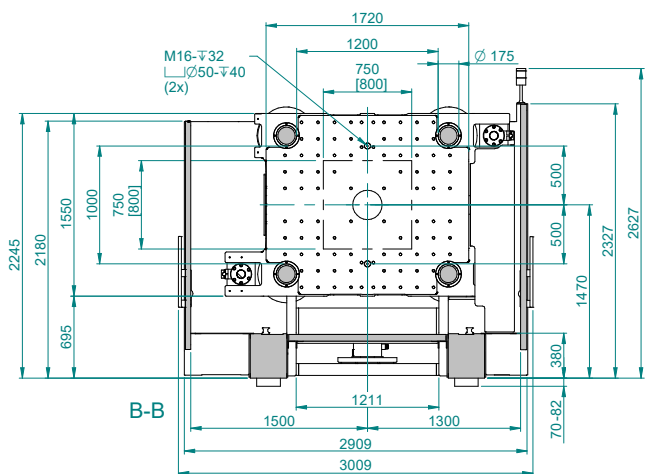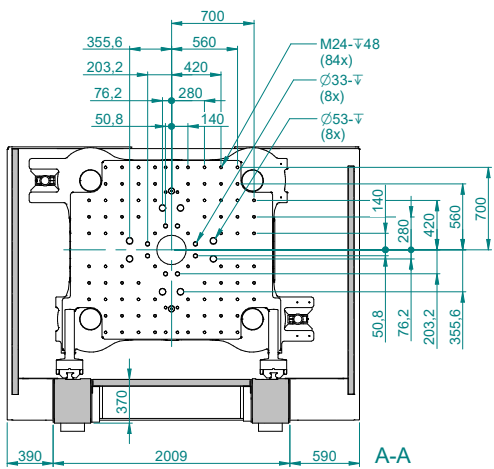

[Dimensions] MacroPower 900

# DATA MacroPower XL 900


Clamping unit		MacroPower XL 900			
Clamping force	kN	9000			
Distance between tie bars	mm x mm	1475 x 1125			
Mold height (min.)	mm	600			
Mold height (max.)	mm	1200			
Opening stroke/opening force	mm/kN	1800/330			
Maximum daylight	mm	2400			
Ejector stroke/ejector force	mm/kN	300/165			
Dry cycle time <sup>1)</sup>	s – mm	4.0 – 770	4.0 – 770	4.0 – 770	4.0 – 770





Injection unit		3400			5100			8800			12800		
Screw diameter	mm	65	75	85	75	85	95	95	105	120	105	120	135
Screw stroke	mm	325	375	375	375	425	425	475	525	525	525	600	600
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	1078	1657	2128	1657	2412	3012	3367	4545	5937	4545	6786	8588
Specific injection pressure	bar	2500	2022	1574	2500	2110	1689	2359	1931	1479	2240	1878	1484
Max. screw speed	min <sup>-1</sup>	309			212			159			143		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	86	131	183	90	127	164	123	144	194	160	187	210
Max. screw torque	Nm	3000	3780	3780	4000	6300	6300	8400	8400	9200	11500	11500	12500
Nozzle stroke/contact force	mm/kN	850/129			950/129			950/129			950/141		
Injection rate into air	cm <sup>3</sup> /s	455	606	778	452	581	725	593	725	947	703	918	1162
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	585	779	1001	581	746	932	742	906	1183	859	1122	1421
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	1040	1385	1779	1291	1659	2072	1483	1812	2367	1563	2041	2583
Barrel heating power	kW	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4	68	81	88
Number of heating zones		6			6			7			7		
Energy efficiency class <sup>3)</sup>		5+	6+	7+	6+	7+	7+	7+	8+	8+	7+	8+	9+

Drive		3400			5100			8800			12800		
Oil tank volume	l	1100			1100			1100			1100		
Electrical power supply without/with Europackage	kVA	130/160			158/188			179/209			222/251		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			70			70			70		

Weights, dimensions													
Net weight clamping unit	kg	37000											
Net weight (exclusive oil) injection unit	kg	9000			9500			11500			15000		
Length x width x height <sup>5)</sup>	m	9.2 x 3.4 x 2.7			9.2 x 3.4 x 2.7			10.1 x 3.4 x 2.7			11 x 3.4 x 2.7		
Max. mold weight <sup>6)</sup>	kg	19000											
Min. mold dimension	mm x mm	800 x 800											

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

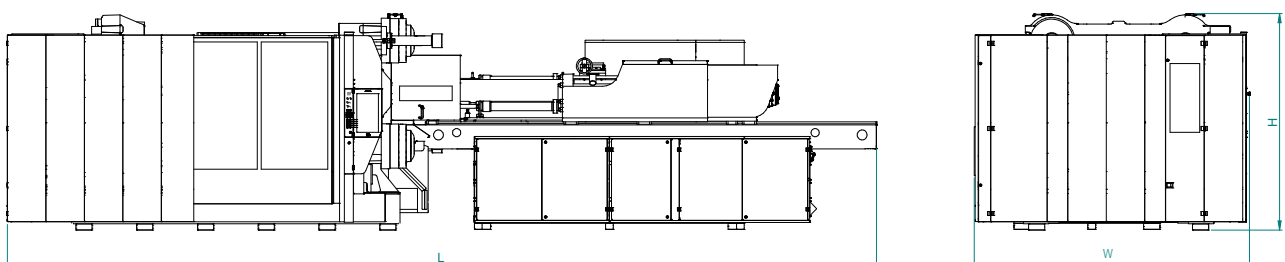

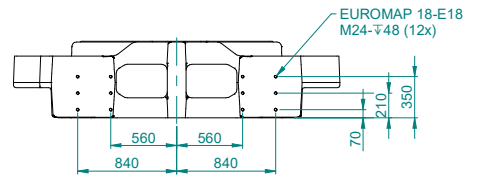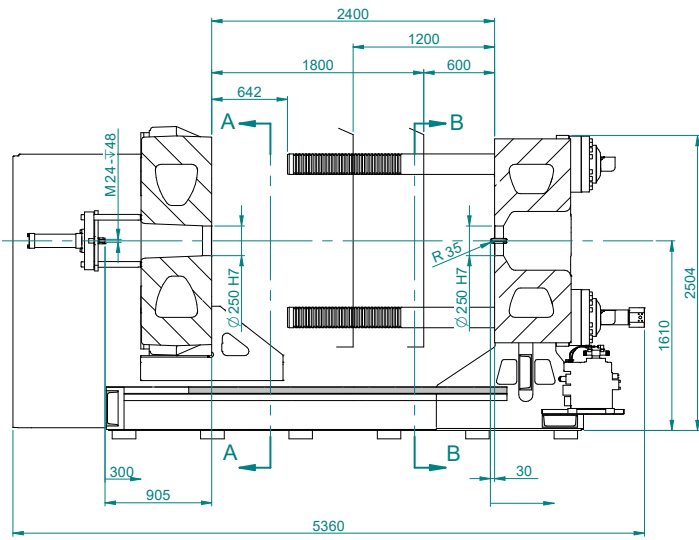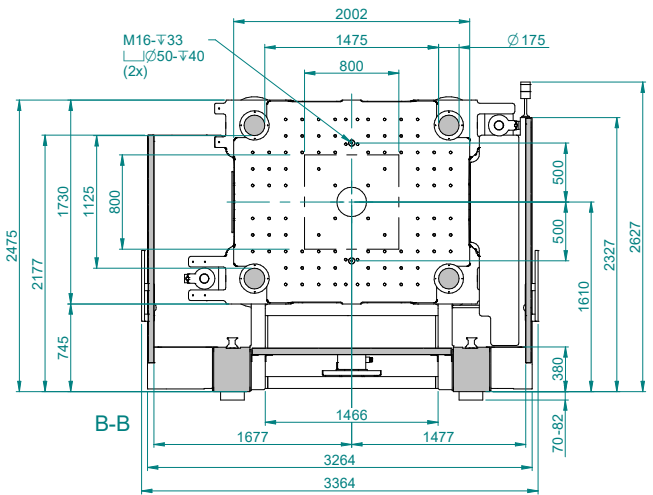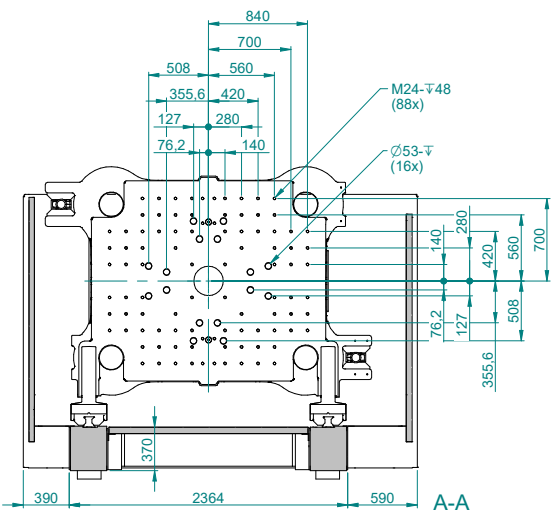

# DATA MacroPower 1000/1100



Clamping unit		MacroPower 1000			MacroPower 1100		
Clamping force	kN	10000			11000		
Distance between tie bars	mm x mm	1450 x 1100					
Mold height (min.)	mm	600					
Mold height (max.)	mm	1200					
Opening stroke/opening force	mm/kN	1800/330					
Maximum daylight	mm	2400					
Ejector stroke/ejector force	mm/kN	300/165					
Dry cycle time <sup>1)</sup>	s – mm	4.0 – 770	4.0 – 770	4.0 – 770	4.0 – 770	4.0 – 770	





Injection unit		3400			5100			8800			12800			16800		
Screw diameter	mm	65	75	85	75	85	95	95	105	120	105	120	135	120	135	150
Screw stroke	mm	325	375	375	375	425	425	475	525	525	525	600	600	600	675	675
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	1078	1657	2128	1657	2412	3012	3367	4545	5937	4545	6786	8588	6786	9662	11928
Specific injection pressure	bar	2500	2022	1574	2500	2110	1689	2359	1932	1479	2240	1878	1484	2203	1741	1410
Max. screw speed	min <sup>-1</sup>	309			212			159			143			125		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	86	131	183	90	127	164	123	144	194	160	187	210	170	210	260
Max. screw torque	Nm	3000	3780	3780	4000	6300	6300	8400	8400	9200	11500	11500	12500	15750		
Nozzle stroke/contact force	mm/kN	850/129			950/129			950/129			950/141			1000/180		
Injection rate into air	cm <sup>3</sup> /s	455	606	778	452	581	725	593	725	947	703	918	1162	936	1185	1463
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	585	779	1001	581	746	932	742	906	1183	859	1122	1421	1277	1616	1995
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	1040	1385	1779	1291	1659	2072	1483	1812	2367	1563	2041	2583	1702	2154	2660
Barrel heating power	kW	27	32.7	37.3	32.7	37.3	41.9	49.7	53.9	62.4	68	81	88	87	100	110
Number of heating zones		6			6			7			7			7		
Energy efficiency class <sup>3)</sup>		5+	6+	7+	6+	7+	7+	7+	8+	8+	7+	8+	9+	8+	8+	9+

Drive																
Oil tank volume	l	1100			1100			1100			1100			1600		
Electrical power supply without/with Europackage	kVA	130/160			158/188			179/209			222/251			269/299		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	68			70			70			70			72		

Weights, dimensions																
Net weight clamping unit	kg							39000								
Net weight (exclusive oil) injection unit	kg	9000			9500			11500			15000			20000		
Length x width x height <sup>5)</sup>	m	9.2 x 3.4 x 2.7			9.2 x 3.4 x 2.7			10.1 x 3.4 x 2.7			10.6 x 3.4 x 2.7			11.8 x 3.4 x 2.7		
Max. mold weight <sup>6)</sup>	kg							19000								
Min. mold dimension	mm x mm				800 x 800						900 x 900					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

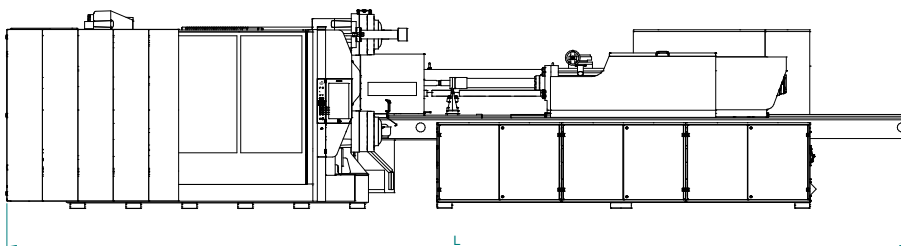

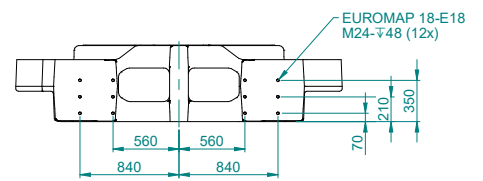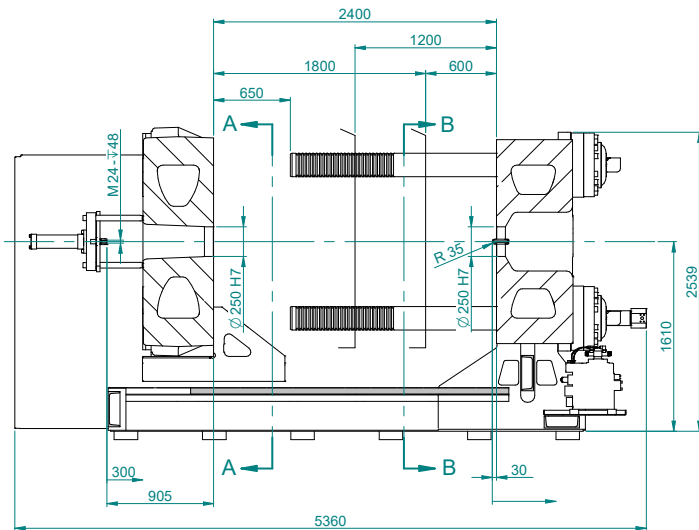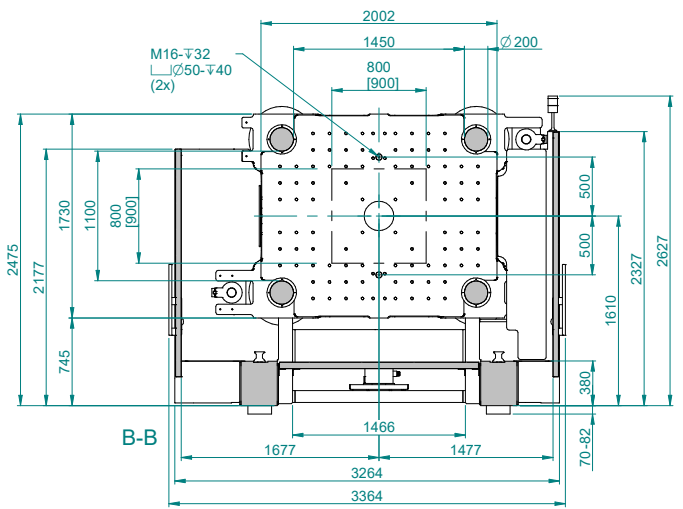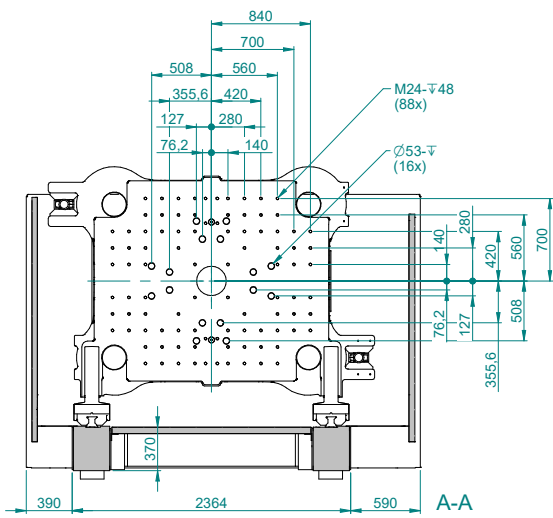

[Dimensions] MacroPower 1000

# DATA MacroPower 1300/1500


Clamping unit		MacroPower 1300			MacroPower 1500		
Clamping force	kN	13000			15000		
Distance between tie bars	mm x mm	1600 x 1250					
Mold height (min.)	mm	700					
Mold height (max.)	mm	1400					
Opening stroke/opening force	mm/kN	2200/475			2400/475		
Maximum daylight	mm	2900			3100		
Ejector stroke/ejector force	mm/kN	300/200					
Dry cycle time <sup>1)</sup>	s – mm	4.5 – 875	4.5 – 875	4.3 – 875	4.3 – 875	4.3 – 875	

Injection unit		5100			8800			12800			16800			23300		
Screw diameter	mm	75	85	95	95	105	120	105	120	135	120	135	150	135	150	165
Screw stroke	mm	375	425	425	475	525	525	525	600	600	600	675	675	675	750	775
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	1657	2412	3012	3367	4545	5937	4545	6786	8588	6786	9662	11928	9662	13253	16571
Specific injection pressure	bar	2500	2110	1689	2359	1931	1479	2240	1878	1484	2203	1741	1410	1981	1707	1410
Max. screw speed	min <sup>-1</sup>	212			159			143			125			125		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	90	127	164	123	144	194	160	187	210	170	210	260	210	260	260
Max. screw torque	Nm	4000	6300	6300	8400	8400	9200	11500	11500	12500	15750	17500	22500	17500	17500	22500
Nozzle stroke/contact force	mm/kN	950/129			950/129			950/141			1000/180			1000/200		
Injection rate into air	cm <sup>3</sup> /s	452	581	725	593	725	947	703	918	1162	936	1185	1463	1187	1465	1772
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	581	746	932	742	906	1183	859	1122	1421	1277	1616	1995	1483	1831	2216
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	1291	1659	2072	1483	1812	2367	1563	2041	2583	1702	2154	2660	3362	4150	5022
Barrel heating power	kW	32.7	37.3	41.9	49.7	53.9	62.4	68	81	88	87	100	110	100	110	120
Number of heating zones		6	6	7	7	7	7	7	7	7	7	7	7	7	7	8
Energy efficiency class <sup>3)</sup>		5+	6+	7+	7+	8+	8+	7+	8+	9+	7+	8+	9+	8+	9+	9+





Drive		5100			8800			12800			16800			23300		
Oil tank volume	l	1100			1100			1100			1600			1600		
Electrical power supply without/with Europackage	kVA	158/188			179/209			269/299			290/320			320/350		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	70			70			70			72			72		

Weights, dimensions		5100			8800			12800			16800			23300		
Net weight clamping unit	kg	54000						55000								
Net weight (exclusive oil) injection unit	kg	9500			11500			15000			20000			21500		
Length x width x height <sup>5)</sup>	m	10.2 x 3.7 x 3.0			11.1 x 3.7 x 3.0			11.6 x 3.7 x 3.0			12.8 x 3.7 x 3.0			13.1 x 3.7 x 3.0		
Max. mold weight <sup>6)</sup>	kg	30000														
Min. mold dimension	mm x mm	900 x 900						1000 x 1000								

- 1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

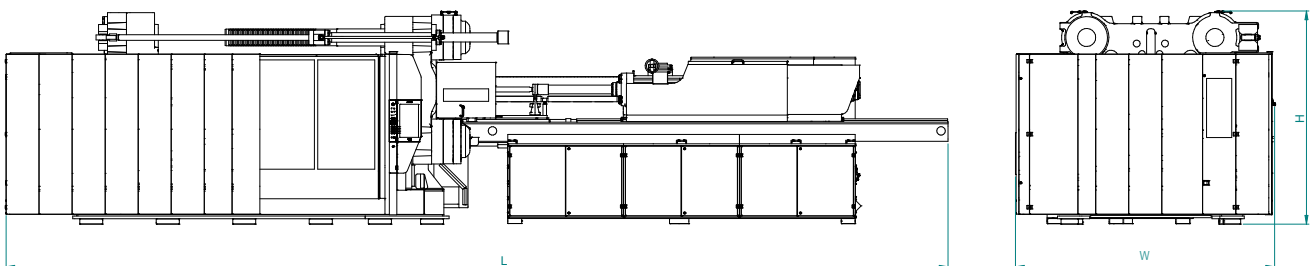



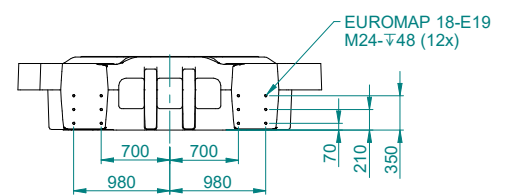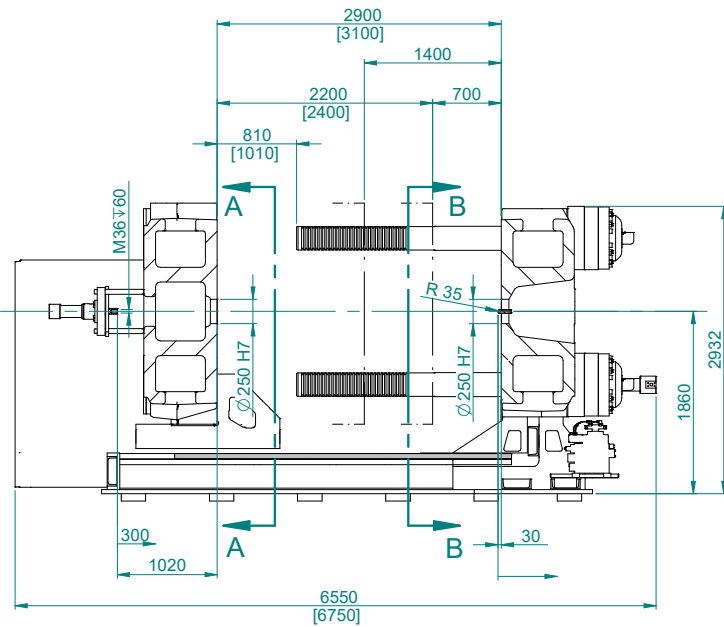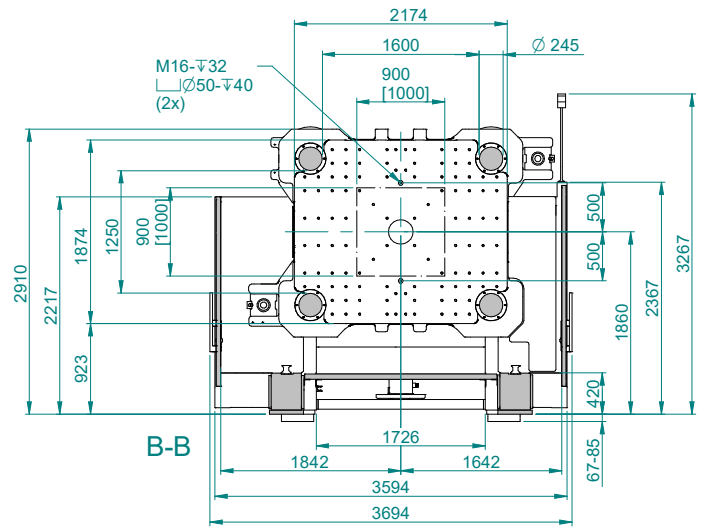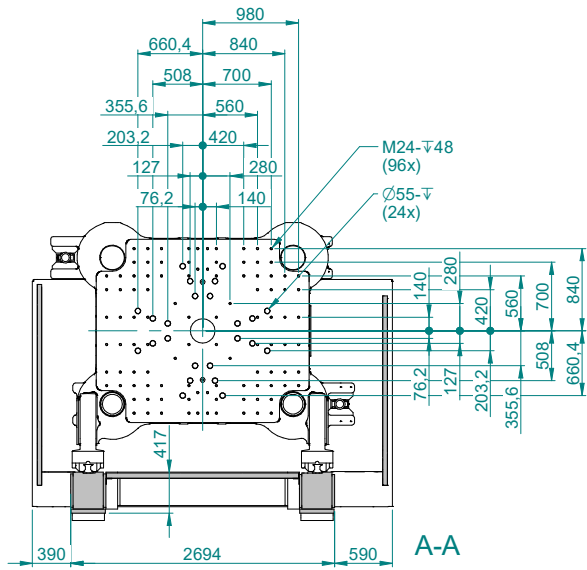

[Dimensions] MacroPower 1500

# DATA MacroPower 1600


Clamping unit		MacroPower 1600				
Clamping force	kN	16000				
Distance between tie bars	mm x mm	1600 x 1250				
Mold height (min.)	mm	800				
Mold height (max.)	mm	1500				
Opening stroke/opening force	mm/kN	2400/475				
Maximum daylight	mm	3200				
Ejector stroke/ejector force	mm/kN	300/200				
Dry cycle time <sup>1)</sup>	s – mm	4.5 – 875	4.5 – 875	4.3 – 875	4.3 – 875	4.3 – 875





Injection unit		5100			8800			12800			16800			23300		
Screw diameter	mm	75	85	95	95	105	120	105	120	135	120	135	150	135	150	165
Screw stroke	mm	375	425	425	475	525	525	525	600	600	600	675	675	675	750	775
Screw L/D ratio		22			22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	1657	2412	3012	3367	4545	5937	4545	6786	8588	6786	9662	11928	9662	13253	16571
Specific injection pressure	bar	2500	2110	1689	2359	1931	1479	2240	1878	1484	2203	1741	1410	1981	1707	1410
Max. screw speed	min <sup>-1</sup>	212			159			143			125			125		
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	90	127	164	123	144	194	160	187	210	170	210	260	210	260	260
Max. screw torque	Nm	4000	6300	6300	8400	8400	9200	11500	11500	12500	15750			17500		
Nozzle stroke/contact force	mm/kN	950/129			950/129			950/141			1000/180			1000/200		
Injection rate into air	cm <sup>3</sup> /s	452	581	725	593	725	947	703	918	1162	936	1185	1463	1187	1465	1772
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	581	746	932	742	906	1183	859	1122	1421	1277	1616	1995	1483	1831	2216
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	1291	1659	2072	1483	1812	2367	1563	2041	2583	1702	2154	2660	3362	4150	5022
Barrel heating power	kW	32.7	37.3	41.9	49.7	53.9	62.4	68	81	88	87	100	110	100	110	120
Number of heating zones		6	6	7	7			7			7			7	7	8
Energy efficiency class <sup>3)</sup>		5+	6+	7+	7+	8+	8+	7+	8+	9+	7+	8+	9+	8+	9+	9+

Drive		5100			8800			12800			16800			23300		
Oil tank volume	l	1100			1100			1100			1600			1600		
Electrical power supply without/with Europackage	kVA	158/188			179/209			269/299			290/320			320/350		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	70			70			70			72			72		

Weights, dimensions		5100			8800			12800			16800			23300		
Net weight clamping unit	kg	60000														
Net weight (exclusive oil) injection unit	kg	9500			11500			15000			20000			21500		
Length x width x height <sup>5)</sup>	m	10.6 x 3.7 x 3.0			11.5 x 3.7 x 3.0			12 x 3.7 x 3.0			13.2 x 3.7 x 3.0			13.5 x 3.7 x 3.0		
Max. mold weight <sup>6)</sup>	kg	30000														
Min. mold dimension	mm x mm	1000 x 1000														

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

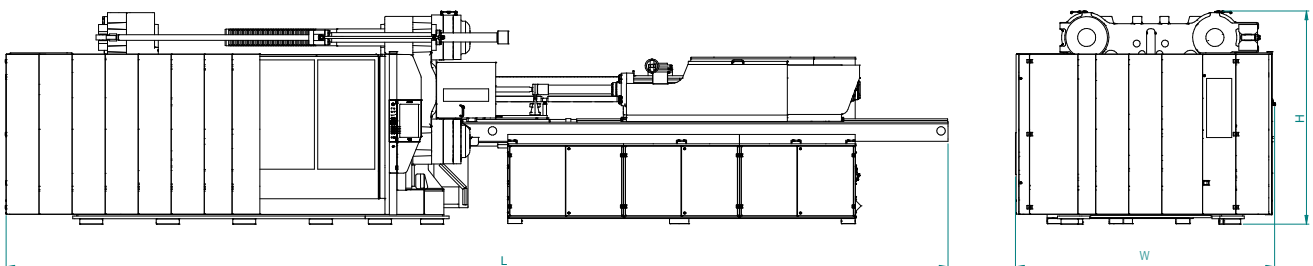

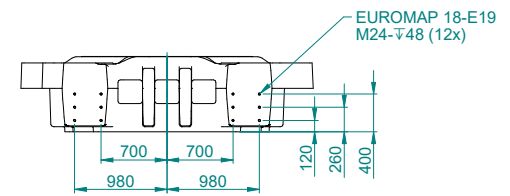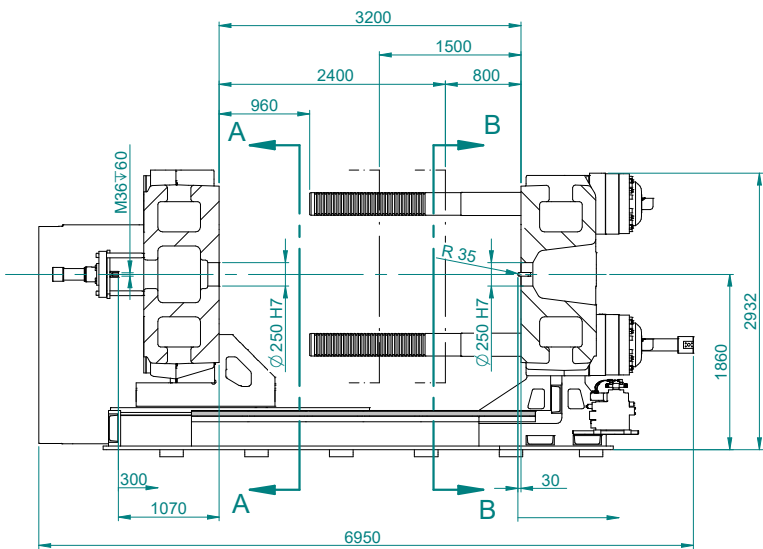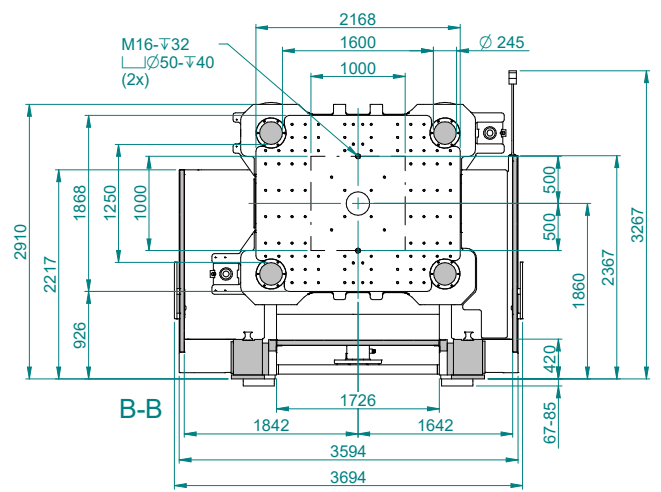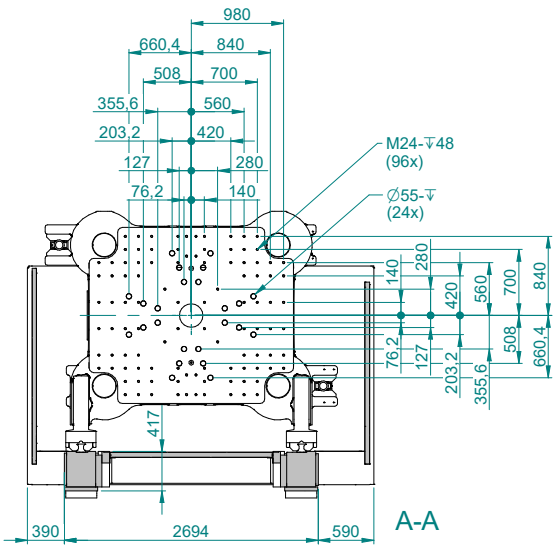

# DATA MacroPower 1800/2200


Clamping unit		MacroPower 1800			MacroPower 2200		
Clamping force	kN	18000			22000		
Distance between tie bars	mm x mm	1850 x 1600					
Mold height (min.)	mm	800					
Mold height (max.)	mm	1600			1800		
Opening stroke/opening force	mm/kN	2600/614			2800/614		
Maximum daylight	mm	3400			3600		
Ejector stroke/ejector force	mm/kN	300/200					
Dry cycle time <sup>1)</sup>	s – mm	5.5 – 1120	5.5 – 1120	5.5 – 1120	5.5 – 1120	5.5 – 1120	





Injection unit		12800			16800			23300			33000		
Screw diameter	mm	105	120	135	120	135	150	135	150	165	150	165	180
Screw stroke	mm	525	600	600	600	675	675	675	750	775	750	825	875
Screw L/D ratio		22			22			22			22		
Theoretical shot volume	cm <sup>3</sup>	4545	6786	8588	6786	9662	11928	9662	13253	16571	13253	17640	22266
Specific injection pressure	bar	2240	1878	1484	2203	1741	1410	1981	1707	1410	2006	1749	1469
Max. screw speed	min <sup>-1</sup>	143	143	127	125			125	125	97	96	96	80
Max. plasticizing rate (PS) <sup>2)</sup>	g/s	160	187	210	170	210	260	210	260	260	210	260	260
Max. screw torque	Nm	11500	11500	12500	15750			17500	17500	22500	25000	25000	30000
Nozzle stroke/contact force	mm/kN	950/141			1000/180			1000/200			1000/200		
Injection rate into air	cm <sup>3</sup> /s	859	1122	1421	936	1185	1463	1187	1465	1772	1462	1769	2105
Injection rate into air with twin pump (option)	cm <sup>3</sup> /s	1016	1327	1679	1277	1616	1995	1582	1953	2363	–	–	–
Injection rate into air with hydraulic accumulator (option)	cm <sup>3</sup> /s	1563	2041	2583	1702	2154	2660	3362	4150	5022	3107	3759	4474
Barrel heating power	kW	68	81	88	87	100	110	100	110	120	115	125	140
Number of heating zones		7			7			7	7	8	7	8	8
Energy efficiency class <sup>3)</sup>		7+	8+	9+	7+	8+	9+	8+	9+	9+	8+	9+	9+

Drive													
Oil tank volume	l	2000			2000			2000			2000		
Electrical power supply without/with Europackage	kVA	330/360			350/380			350/380			380/410		
Emission sound pressure level <sup>4)</sup> servo	dB(A)	72			72			72			72		

Weights, dimensions													
Net weight clamping unit	kg	90000						91000					
Net weight (exclusive oil) injection unit	kg	18000			21000			22500			30000		
Length x width x height <sup>5)</sup>	m	12.8 x 4.4 x 3.3			13.9 x 4.4 x 3.3			14.2 x 4.4 x 3.3			14.8 x 4.4 x 3.3		
Max. mold weight <sup>6)</sup>	kg	45000											
Min. mold dimension	mm x mm	1100 x 1100						1400 x 1400					

1) theoretical according to EUROMAP 6 2) according to WITTMANN BATTENFELD norm  
 3) calculated according to EUROMAP 60.1 (Cycle I) 4) according to ÖNORM EN 201:2010 annex K  
 5) length with medium screw diameter in rearmost operating position 6) max. 2/3 on clamping platen

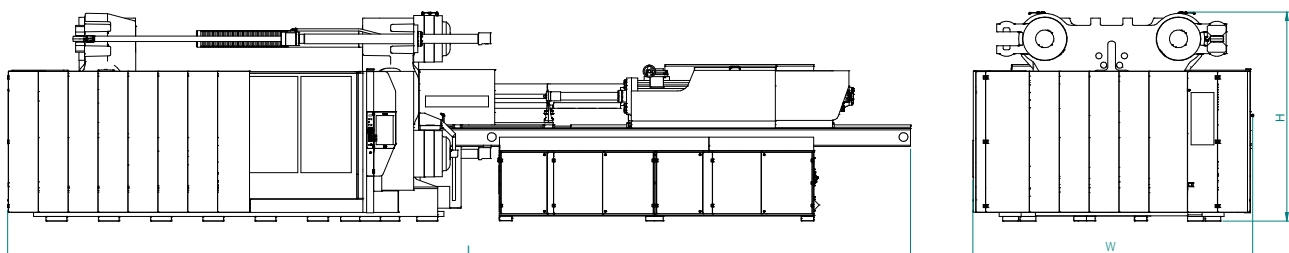

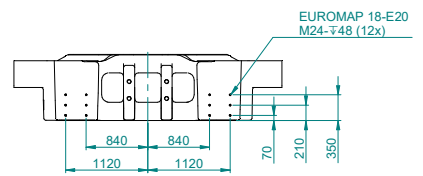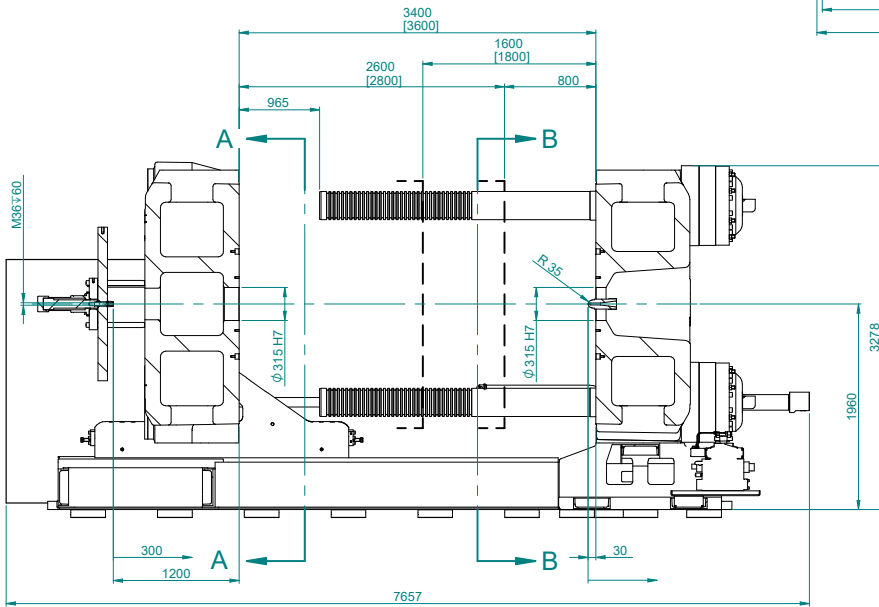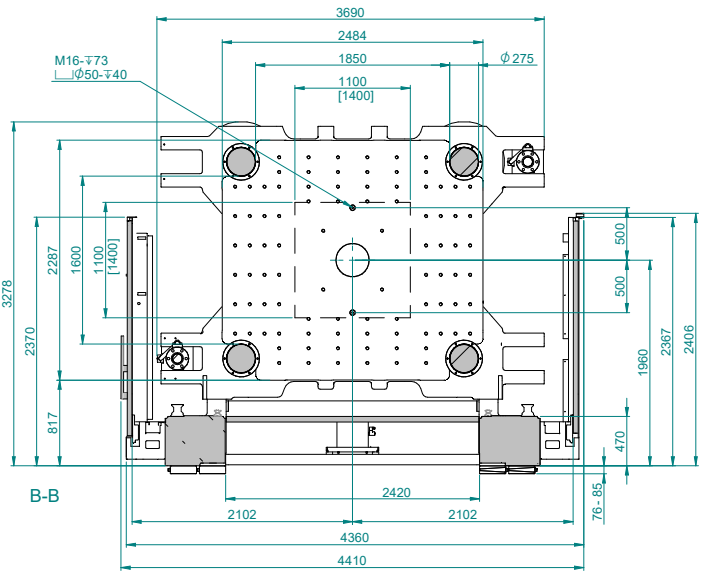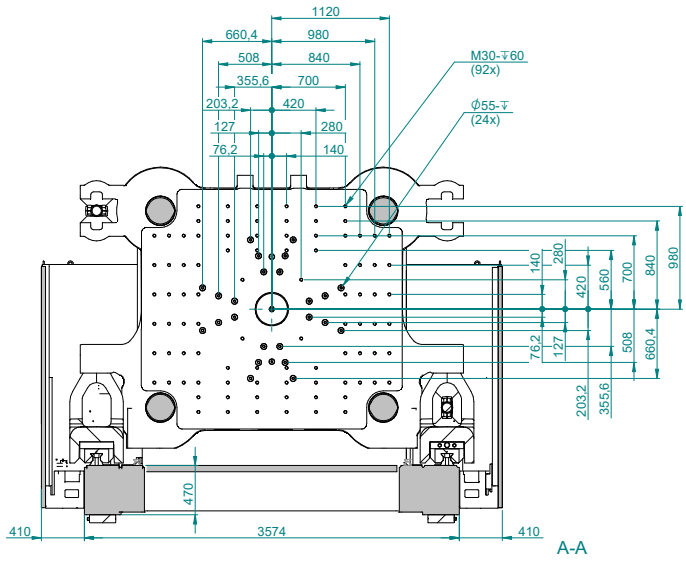

[Dimensions] MacroPower 2200

# MOLD DIMENSIONS

## » Overview mold weights

The MacroPower series is laid out for the following maximum mold weights and/or mold torques. If the maximum weight or maximum torque is exceeded, an additional mold support will be necessary. Whenever the values are exceeded, WITTMANN BATTENFELD must be consulted.

$$W_m = 2/3 \times W$$

$$T_m = W_s \times \text{max. mold h.}/3$$

$$W_f = 1/2 \times W$$

$$T_f = W_f \times \text{max. mold h.}/4$$

$$W_c = 2/5 \times W$$

$$W_{\text{max.}} = W + W_c$$

Clamping Unit	Machine		Moveable platen		Fixed platen		Center platen	
	max. mold weight	max. mold height	max. weight	max. torque	max. weight	max. torque	max. weight	max. total weight
	W (t)	(mm)	W <sub>m</sub> (t)	T <sub>m</sub> (tm)	W <sub>f</sub> (t)	T <sub>f</sub> (tm)	W <sub>c</sub> (t)	W <sub>max</sub> (t)
400, 450	6.5	850	4.3	1.2	3.3	0.7	2.6	9.1
XL 450, 500, 550	8	900	5.3	1.6	4.0	0.9	3.2	11.2
XL 550, 650, 700	10	950	6.7	2.1	5.0	1.2	4.0	14.0
XL 700, 850, 900	12	1000	<b>8.0</b>	<b>2.7</b>	<b>6.0</b>	<b>1.5</b>	4.8	16.8
XL 900, 1000, 1100	19	1200	12.7	5.1	9.5	2.9	7.6	26.6
1300, 1500, 1600	30	1400	20.0	9.3	15.0	5.3	12.0	42.0
1800, 2200	45	1600	30.0	16.0	22.5	9.0	18.0	63.0

## » Mold torque calculation examples

MacroPower 850 t clamping force  
Mold weight W = 11 t

Mold weight clamping side W<sub>m</sub> = 7 t  
Distance to center of gravity x<sub>m</sub> = 0.3 m

Mold weight on fixed platen side W<sub>f</sub> = 4 t  
Distance to center of gravity x<sub>f</sub> = 0.2 m

$$T_m = 7 \text{ t} \times 0.3 \text{ m} = \mathbf{2.1 \text{ tm}}$$

$$T_f = 4 \text{ t} \times 0.2 \text{ m} = 0.8 \text{ tm}$$

All values within specifications, no additional support required.

MacroPower 850 t clamping force  
Mold weight W = 11 t


Mold weight clamping side W<sub>m</sub> = 8 t  
Distance to center of gravity x<sub>m</sub> = 0.4 m

Mold weight on fixed platen side W<sub>f</sub> = 3 t  
Distance to center of gravity x<sub>f</sub> = 0.2 m

$$T_m = 8 \text{ t} \times 0.4 \text{ m} = \mathbf{3.2 \text{ tm}}$$

$$T_f = 3 \text{ t} \times 0.2 \text{ m} = 0.6 \text{ tm}$$

Value T<sub>m</sub> exceeds specification, additional support required.

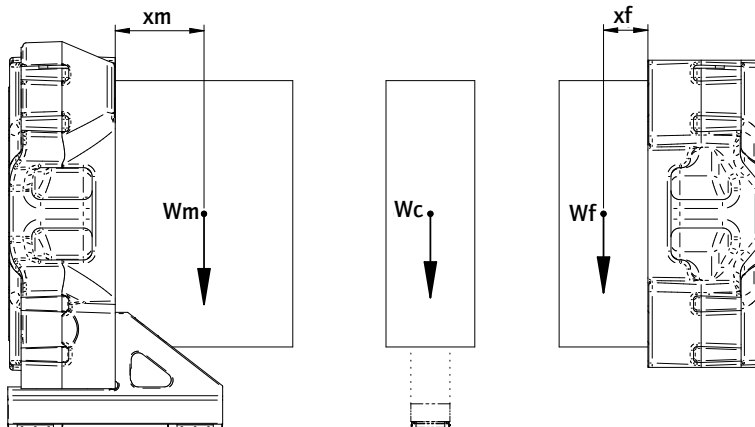

# REDUCTIONS IN CLAMPING FORCE

- » **Reductions in clamping force for smaller molds**  
The MacroPower machine series is laid out for minimum mold dimensions as indicated in the technical specifications. Down to the minimum mold size specified, the machine's clamping force can be fully utilized. When smaller molds are used, the clamping force must be reduced, depending on the mold dimensions, according to the overview below. The mold size used must not fall below the minimum mold dimensions specified in the chart.
- » **Example of clamping force reduction (chart)**  
MacroPower 900 t clamping force, mold dimensions 700 mm x 800 mm (smaller dimension is relevant). A mold dimension of 700 mm leads to a reduced maximum clamping force of 800 t.


- » **Mold parallelism**  
The MacroPower is equipped with high-precision linear guides on the moving platen and therefore guided with extreme accuracy and parallelism across the entire stroke.

Its platen parallelism is within half of EUROMAP 9 tolerance. For correct operation, the maximum parallelism of 0.2 mm with minimum mold dimensions must not be exceeded.

**PLEASE NOTE:**

The molds must be inserted symmetrically to both axes of the clamping platens!

Reductions in clamping force for smaller molds MacroPower

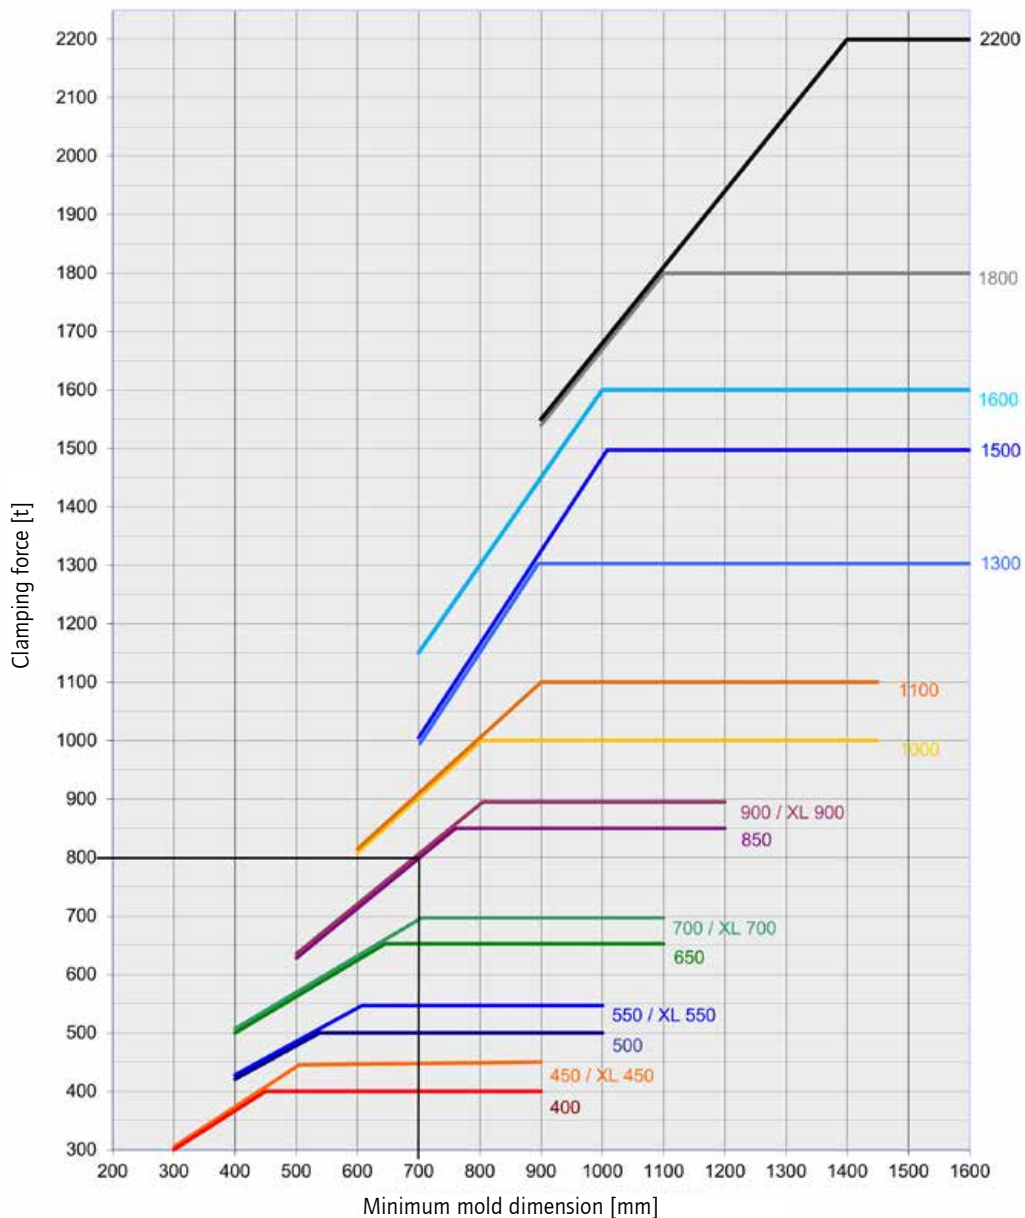

# STANDARD

## Base machine

Drop - voltage 230/400 V/3p+N-TN/TT, 50 Hz
Painting RAL 7047 tele grey 4 / RAL 7016 anthracite / RAL 3004 crimson
Water cooling system with servo electric controlled membrane valves, air cooling system
Two-piece machine frame, clamping unit/injection unit
Ejection area - ejection shaft cover according to EN ISO 20430
Test-run with hydraulic oil HLP32 zinc free according to DIN 51524 T2/ purity level 17/15/12 according to ISO 4406 (Attention: oils is not included in delivery), lubricants according to H2-quality
Printed operating manual incl. user manual on USB flash drive in any EU language acc. to definition of country incl. type examination certificate TÜV Austria in German incl. protocol: electrical safety acc. to EN 60204-1
Injection moulding machine according to machinery directive 2006/42/EG incl. declaration of conformity and CE-marking

## Hydraulics/Pneumatics

Drive unit S1 with speed controlled servo motor for hydraulic pump incl. Additional pump for core pull movement, parallel ejection
Hydraulics with oil cooler controlled in water inlet of cooling, oil level
Bypass oil filtration by fine flow filter with electrical clogging indicator
Oil preheating of hydraulic drive
Lock-up valve with supervision for suction pipe
Oil tank with connections for external oil filtration
Hydraulic pressure displayed

## Clamping unit

Clamping force adjustable via touchscreen
Clamping force and closing and opening forces adjustable
Mold safety program
Moving platen supported by positioned linear guides
Mold platen according to EUROMAP 2, clamping surface metallic bright, rest painted
Fixing holes for robot on fixed platen as per EUROMAP 18
Hydraulic multi stroke ejector
Scanner in the mold area for protection against unauthorized access (from MacroPower XL 700)

## Injection unit

Hydraulic screw drive
Injection, holding and back pressure controlled via servo valve with defined nozzle contact pressure
Plasticizing unit AK+ for thermoset processing, 3-zone universal screw, quick acting check valve (3 parts), heater bands up to 350 °C without insulation (insulation from injection unit 12800 standard)
Thermocouple failure monitor
Maximum temperature supervision
Defined nozzle carriage pressure
Plug-in ceramic heater bands
Temperature control of feed throat integrated
Linear guides in standard design, position sensor with non-contact stroke transducer
Selectable barrel stand-by temperature
Decompression before and/or after metering
Physical units - bar, ccm, mm/s etc.
Screw protection
Auxiliary screw speed indication
Linear interpolation of holding pressure set values
Bar chart for barrel temperature with set value and actual value display
Selectable injection pressure limitation
Changeover from injection to holding pressure depending on stroke, time and pressure
Open nozzle R35
Splash guard and barrel covering in standard execution according to EN 201, L/D 22 protected via transponder switch
Up to injection unit 5100 material hopper 6 litres (MH206) for automatical material feed, sliding device with shut-off function for material with sliding guide, From injection unit 8800 slide device without material hopper

## Safety gate

Covering injection side - maintenance door screwed together
Standardized safety gates, Perspex glass clear / frame RAL 3004 crimson
Monitored safety gate electrically controlled according to CE on front and rear side
Maintenance-free safety gate locked by electromagnet
Safety gate free for mold change and handling by robot
Safety gate rear side lowered at the top of the upper tie-bar
Safety gate rear side to be opened to max. daylight for easy mold change, from size 850 t

## Electrics

AmbiLED-status indicator
Switch cabinet cooling - circulation fan for environment temp. to 30 °C
Emergency stop switch button in control panel and on non operator side
USB connection on control unit for printer or network
1 Ethernet interface (switch cabinet)
Integration package Wittmann 4.0 BASE consisting of: Router for integration respectively protection of injection moulding cell in production network

## Control system

Control system Unilog B8 - 21,5" multi-touch screen (full HD)
Control panel with selectable haptic keys
Clamp force display and supervision
Software for operating hours counter
Closing/Opening - 5 profile steps
Ejection forward/back and Nozzle forward/back - 3 profile steps
Injection/Holding pressure - 10 profile steps
Screw speed/Back pressure - 6 profile steps
Parts counter with good/bad part evaluation
Purging program through open mold
Stroke zero offset settings
Start-up program
Switchover to holding pressure MASTER/SLAVE by injection time, screw stroke/injection volume and injection pressure
Self-teaching temperature controller
Display of temperature inside electrical cabinet
Seven-day timer
Access authorization via RFID authorization system (1 x check card IT-level-15, 1 x token customer level-30 and 1 x token customer service level-20 included in delivery)
Freely configurable status bar
Physical, process-related units
Automatic dimming
Logbook with filter function
User programming system (APS)
Userpage
Note pad function and Hardcopy function
Cycle time analysis
Internal data storage via USB connection or network
Online language selection and Online selection of imperial or metric units
Operator manual incl. hydr., mech. and electr. schedules online
Time Monitoring
Basic Quality Monitoring (1 freely configurable network connection, quality table with 1000 storage depth, events protocol (logbook) for 1000 events, actual value graphics with 5 curves, 1 envelope curves monitoring)
Injection integral supervision
Metering integral supervision
Alarm message via e-mail
SmartEdit - sequence editor
QuickSetup - assistance program for initial parameter setting
Energy consumption monitoring for motors and heating
2 outputs and inputs, freely programmable



## Base machine

Special voltage
Handling package with open machine safety gate on non operator side
Non-standard mold height/opening stroke
Mounting of fast-stroking cylinder exchanged diagonally
Machine frame increased
Special paint

## Hydraulics/Pneumatics

Drive unit with speed controlled servo motor for hydraulic pump incl. Additional pump for core pull movement, parallel ejection, fast injection and/or hydraulic mold shut-off nozzle
Injection parallel to clamp force build-up
Raw filter in water inlet of cooling incl. adapter with ball valve for oil maintenance on oil tank
Hydraulic core pull for clamping plate/nozzle plate, interface according to EUROMAP 13, incl. or without core pull pressure release
Pneum. core pull on clamping plate/nozzle plate
Hydraulic manifolds and pneumatic manifolds for one mold shut-off nozzle or more
Air valves on nozzle plate/clamping plate
Compressed air pressure maintenance unit incl. 1 or more way pressure regulation incl. directional exhaust valve with blocking function

## Clamping unit

Support for middle plate or heavy molds
Mold platen according to SPI, JIS, T-slots
Automatic tie-bar retract device
Hydraulic ejector in reinforced execution
Ejector pressure/speed controlled by P/Q servo valve
Double check valve to keep ejector in end-position
Ejector cross according to EUROMAP/SPI/JIS
Mechanical or pneumatic ejector coupling
Ejector platen safety
Hydromechanical mold safety mechanism

## Injection unit

Screw drive by A.C. servo-motor for parallel recovery during cycle
High torque hydraulic screw drive
Corrosion resistance injection unit
Plasticizing unit AK++ in high wear and corrosion resistant execution
Plasticizing unit AKCN in wear and corrosion resistant execution, for processing PMMA and ABS and PC
Grooves in the feeding zone
Barrier section, screw with mixing section
Melt pressure transducer, melt temperature sensor
Heater bands up to 450 °C
Plasticizing unit in special execution for PVC, Cellmould
Barrel insulation (standard up from injection unit 12800)
Open nozzles in special execution
Needle type shut-off nozzle operated pneumatically or hydraulically
Pneumatic cross-bolt type shut-off nozzle
Open Airmould nozzle, pressure controlled
Barrel covering and splash guard in special execution
Vacuum package incl. vacuum pump
Material hopper in special design, sliding device with shut-off function for material with linear guide with manually crank drive
Hopper magnet

## Safety gate

Safety gate clearance operator side/rear side extended
Safety gate operator side electrically operated, standard from size 1000 t
Front side gate safety system for manual part removal incl. clearance of ejector

## Cooling and conditioning

Cooling water distributor with/without blow-off valve
Solenoid valve for cooling water distributor
Filter back flushable/water pressure supervision in inlet pipe
Distributor block on nozzle plate/clamping plate
Flowcon plus, integrated into control system

## Electrics

Temperature control zones for hot runner
Acoustic element integrated in signal lamp
Socket combination
Additional fan in electric switch cabinet for increased environment temperature
Cabinet air conditioner
Interface for robot, conveyor belt, TCU, dosing unit, Airmould, mold surveillance, production data logging system, RJG eDart, Priamus BlueLine, danger zone boundary, ejection in mold middle plate, relay signals, vacuum pump

## Control system

Cavity pressure switchover
BNC sockets for injection process analysis
Expert Quality Monitoring (4 freely configurable network connections, quality table with 10000 storage depth, events protocol (logbook) for 10000 events, actual value graphic with 16 curves, 4 envelope curves monitoring, SPC charts, trend diagrams)
Mold identification
Special programs on customer request
HiQ Cushion - melt cushion control
HiQ Flow - injection integral control
HiQ Melt - monitoring of material quality
Software Tandemmould, multiple data sets
Energy consumption analysis
Injection compression and venting program
Special program ejection of cold slug
Additional output card/input card, freely programmable
Integration packages Wittmann 4.0

## Additional equipment

Plinth for robot
Tool kit
Levelling pads
Lighting in mold space
Mold clamping systems in electrical or hydraulic execution
Integration package (robot, feeder, dosing unit, TCU, mold integration)
WITTMANN BATTENFELD web service during warranty period free of charge
Remote control package





The Wittmann logo is located in the bottom right corner of the page. It consists of the word "Wittmann" in a white, italicized, sans-serif font, set against a dark red, rounded rectangular background.

**WITTMANN BATTENFELD GmbH**

Wiener Neustädter Strasse 81

2542 Kottlingbrunn | Austria

Tel.: +43 2252 404-0

[info@wittmann-group.com](mailto:info@wittmann-group.com)

[www.wittmann-group.com](http://www.wittmann-group.com)